



Work Light - Heavy Duty

- Flashlight Floodlight Dual-light
- Rechargeable
- Anti-roll Tri-Lobal Design
- Bright LEDs 50,000 hour life
- Microprocessor controlled
- Impact and chemical resistant housing
- Replaceable NiMH battery pack
- 3 hour charge time
- AC & DC adapters included

Specifications

- · Flashlight: 300 Lumens
- · Floodlight: 400 Lumens
- Selectable flashlight or floodlight strobe
- Run-time: Flashlight or floodlight 9 hours,
 Flashlight strobe 24+ hours, Dual-light 4 hours,
 Dual-light strobe 7 hours
- Vehicle mount
- Moisture resistant
- Traffic Cone Accessories
- Red P/N 66355R
- Yellow P/N 66355Y













Work Light - Heavy Duty

- Flashlight Floodlight Dual-light
- Rechargeable
- Anti-roll Tri-Lobal Design
- Bright LEDs 50,000 hour life
- Impact and chemical resistant housing
- Replaceable NiMH battery pack
- 3 hour charge time
- AC & DC adapters included

- · Flashlight: 160 Lumens
- Floodlight: 200 Lumens
- Dual-switch control
- Tandem operation
- Auto-strobe
- Run-time: Flashlight 6 hours, Floodlight 2 hours, Both 2 hours
- Waterproof to 3 feet (IP-67)
- Traffic Cone Accessories
- Red P/N 66357R
- Yellow P/N 66357Y













Work Light - 66 LED/Magnetic

- Dual Function / Spotlight Floodlight
- Rechargeable
- 35,000 hour LED life
- 60 LED Floodlight / 6 LED Spotlight
- Bright white LEDs
- Impact and chemical resistant housing
- · Will stand upright on flat surface
- Dual position magnetic hook attaches to top or side
- Rechargeable NiMH battery pack
- 8 hour charge time
- AC & DC adapters included

Specifications

- Spotlight: 12 Lumens
- Floodlight: 120 Lumens
- Length: 14.25" (without hook)
- Weight: 9.5 oz with battery
- Dual purpose magnet
- Run-time: Spotlight 18 hours / Floodlight 4 hours
- 3 position rocker switch





P/N 66358





Magnetic Hook - P/N 66358HOOK

Work Light - Safety Orange

- Dual-Mode Flashlight Floodlight
- Rechargeable high quality NiMH battery
- Bright white LEDs
- 35,000 hour life
- Small size Light weight
- Safety orange housing
- Impact and chemical resistant
- Removable hanger-hook and magnet
- Long run-time per charge
- Home and car chargers included

- Flashlight: 1 LED = 65 Lumens
- Floodlight: 60 LEDs = 120 Lumens
- Run-time 4 hrs. flashlight, 4 hrs. floodlight
- Charge time 4 hours
- Length: 11.5 in.
- Weight: 12.0 oz







Slim Line

- Flashlight Floodlight Dual-light
- Super-bright white LEDs
- 35,000 hour life
- Small size Light weight
- Moisture and impact resistant
- Safety orange housing
- Premium AAA batteries included
- Soft-touch matte finish

Specifications - P/N 66531

- Flashlight: 1 LED = 25 Lumens
- Floodlight: 12 LEDs = 24 Lumens
- Run-time: 18 hours flashlight,
 15 hours floodlight, 8 hours Dual-light
- · Pocket-clip and holster included
- Traffic Cone Accessories
- Red P/N 66353R
- Yellow P/N 66353Y











P/N 66351

Specifications - P/N 66532

- Flashlight: 1 LED = 65 Lumens
- Floodlight: 36 LEDs = 72 Lumens
- Run-time: 12 hours flashlight,
 7 hours floodlight, 5 hours Dual-light
- · Holster and clip-magnet included
- Traffic Cone Accessories
 - Red P/N 66353R
- Yellow P/N 66353Y



Head Lamp

- Spotlight Floodlight Dual-light
- Super-bright white LEDs
- 35,000 hour life
- Selectable light control
- Adjustable tilt
- Non-slip headband
- Small size Light weight
- Moisture and impact resistant
- Safety orange or black housing
- Premium AAA batteries included
- Soft-touch matte finish

- Spotlight: 1 LED = 65 Lumens
- Floodlight: 12 LEDs = 24 Lumens
- Tight focus spotlight beam
- Broad beam floodlight
- Activate both for maximum area illumination
- · Run-time: 18 hours Flashlight and Floodlight, 10 hours Dual-light













Clamp Light - Hands Free

- Spotlight/Flashlight Floodlight Dual-Light
- 35,000 hour LED life
- 1 Spotlight LED
- 12 Floodlight LEDs
- Multi-Function Locking Clamp
 - Stands By Itself
 - Secures to Round or Flat Objects
- Light Reaches Out In All Directions
 - Light Swivels 360°
 - Light Tilts 180°+
- Impact & Moisture Resistant Light Housing
- Engineered Polymer Clamp Base
- Premium AAA Batteries Included

Specifications

- · Spotlight: 65 Lumens
- · Floodlight: 24 Lumens
- · Dual-Light: 89 Lumens
- Detachable Light with Magnetic Base
- · 2 Beam Flashlight
- · Run-time: Up to 18 hours



Detachable Light with Magnetic Base









Self Standing







Round Stock



The Intruder

- 8 Super Bright LEDs
- Protective Head with Recessed LED
- Switch Cap
- High Strength Aluminum body
- O-Ring Sealed for Weather Resistance
- Includes 1 AA Battery
- 6" Wrist Strap

- · Constant on
- · Momentary on
- · Run-time: Up to 20 hours





Extendable Magnetic LED Flashlight

P/N 66349



- Weight: 3.5 ounces
- Magnet at Light is for Powerful Retrieval
- Magnet on Grip Acts as A Third Hand
- 3 Super-Bright LEDs
- Extends from 6.5" to 21"
- Flexible Shaft to Access Hard-to-Reach Places
- A Pick-Up Tool and a Flashlight


- Uses 4 LR44 Batteries (included)
- Replacement Batteries
 - LR44 1.5V 4 PK P/N 29206



Utility Tool Holster

P/N 70005



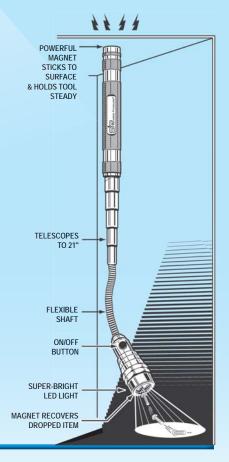

Pocket Floodlight

- Up to 10X brighter than ordinary penlights
- Pure Cool White LED High Performance Light
- Lightweight & Compact
- Clips easily and comfortably into any pocket
- Indestructible Aluminum T6 w/ Black Type II Anodized Body
- Water & Dirt Resistant
- Rugged tailcap switch rated at 100,000 cycles
- Batteries Included
- Designed for all technicians in a demanding shop
- For use in manufacturing or maintenance environments

- Brightness: 120 Lumens
- Forward Current: 400 mA
- Battery Voltage: Between 3.3 and 4.8 volts
- 3 AAAA alkaline batteries, included*
- Run-Time: 2 hours to half brightness, 4 hours light w/ typical intermittent use
- Reflector: Custom design w/ bright center spot, orange peel (OP) surface for an even spill beam
- Switch Tailcap: Click ON/Click OFF equipped with a rubber cap that seals out dirt and grit
- Water Resistant: Threaded joints have rubber o-ring seals, tailcap switch is sealed with a rubber cap
- Head Diameter: 9/16" (14 mm)
- Body Diameter: 7/16" (10 mm)
- Body length: 6" (15 cm)



Red Pocket LED Floodlight

- Up to 10X brighter than ordinary "Red" LED penlights
- LED high performance light
- Lightweight and compact
- Clips easily and comfortably into any pocket
- T6 Aluminum with Red Type II Anodized Body
- Water and dirt resistant
- Rugged tailcap switch rated at 100,000 cycles
- Energizer batteries included
- Applications: Preserves night vision of individuals; Aviators reading flight plans Security; Reading equipment in the dark; Doctors/Nurses monitoring patients Military/Police; Emergency Service Personnel; Astronomers; Photographers; Ushers

Specifications

- Brightness: 46 Lumens
- LED Wavelength: Cree Xp-C, Red 620-630 nm
- Forward Current: 350 mA
- Battery Voltage: Between 3.3 and 4.8 volts
- 3 AAAA alkaline batteries, included*
- Run-Time: 2 hours to half brightness, 4 hours light w/ typical intermittent use
- Reflector: Custom design w/ bright center spot, orange peel (OP) surface for a huge floodlight beam
- Switch Tailcap: Click ON / click OFF, plus half-press momentary on equipped with a rubber cap that seals out dirt and grit
- Water Resistant: Threaded joints have rubber o-ring seals, tailcap switch is sealed with a rubber cap
- Head Diameter: 9/16" (14 mm)
- Body Diameter: 7/16" (10 mm)
- Body length: 6" (15 cm)

*6-pack AAAA batteries: P/N 29207

Professional UV LED Inspection Floodlight

- Up to 20X brighter than ordinary UV penlights
- High performance UV LED light
- Lightweight and compact
- Clips easily and comfortably into any pocket
- T6 Aluminum with Violet Type II Anodized Body
- Water and dirt resistant
- Rugged tailcap switch rated at 100,000 cycles
- Energizer batteries included
- Applications: A/C refrigerant dye leak detection; Hairline crack detection/Quality control
 Fluorescent hand stamp verification; Dog, cat & rodent urine stain detection
 Restroom cleanliness inspection; Document and lab analysis; Crime scene investigation
 Paint authentication; Currency verification; Bacteria detection; Gem inspection; UV curing

Specifications

- Brightness: 120 mW emitter radiant flux
- LED Wavelength: UltraViolet (UVA) 400-405 nm
- Forward Current: 350 mA
- Battery Voltage: Between 3.3 and 4.8 volts
- 3 AAAA alkaline batteries, included*
- Run-Time: 2 hours to half brightness, 4 hours light w/ typical intermittent use
- Reflector: Custom design with a bright center spot, orange peel (OP) surface for an even beam
- Switch Tailcap: Click ON / click OFF, plus half-press momentary on equipped with a rubber cap that seals out dirt and grit
- Water Resistant: Threaded joints have rubber o-ring seals, tailcap switch is sealed with a rubber cap
- Head Diameter: 9/16" (14 mm)
- Body Diameter: 7/16" (10 mm)
- Body length: 6" (15 cm)



P/N 66333

Intrinsically Safe LED Dual-Light

- Safety rated
- Designed for hazardous workplace environments
- Safe to use in potentially explosive atmospheres
- Dual-Light Innovation[®]
- 80 Lumen CREE[®] XPE LED
- Sharp Focused Flashlight
- Broad Beam Floodlight
- 50,000 hour LED life
- Separate switches control flashlight and floodlight
- Momentary or constant-on
- Non-slip grip textured push-buttons
- Rugged hi-visibility green polymer housing
- Impact and chemical resistant
- Built-in pocket clip and lanyard
- Waterproof to 1 meter (IP67)
- Length: 7.0 in (178 mm)
- Limited lifetime warranty







ANSI Performance

- Flashlight: 80 Lumens
- Floodlight: 80 Lumens
- Dual-Light: 160 Lumens
- Flashlight beam distance: 95 m
- Run-time:
 - 14.5 hours Flashlight/Floodlight
 - 7.2 hours Dual-light

Note: The Intrinsically Safe LED Dual-Light uses 3 AA alkaline batteries (not included). Order batteries with P/N 29203.

cETLus Listed Intrinsically Safe for use in Class I II III Div 1 Groups A,B,C,D,E,F & G Hazardous Locations



P/N 66339

CLUSSIANS DE L'ORGER AG 1. RECURSITE REPORTE DE L'AMBRE DE L'AMBRE

P/N 66340

Technician's Floodlight

- Over 300 lumens of brilliant white light with no hot spots or dark spots
- Strong, retractable hook allows you to hang it
- Dual rare-earth magnets, for fastening it to a work-space
- Removable belt clip
- Head tilts 180° and rotates 360°
- 6 AA rechargeable NiMH battery pack included, with smart recharger
- Run-time: High: 2 hours continuous, Low: 8 hours
- Battery condition indicator light
- Ergonomic light-weight, secure grip
- Includes a 12V charger and a 120V charger
- Flared base allows standing light on end
- Standard 1/4-20 threaded hole in base for tripod (not included)
- Length: 10-1/4" (26 cm)
- Weight: 1 lb (0.5 kg)
- Applications: Automotive; Industrial; HVAC repairmen; IT maintenance; Emergencies; Power Outages

- Brightness: High: 300 emitter lumens / Low: 75 emitter lumens
- Color: Cool White
- LED: Cree XP-G, 5 W
- Material: High impact ABS, except hook, which is glass reinforced ABS
- Head Adjustment: Tilt tension adjustment screw prevents head from flopping
- Hook length: 3" (7.5 cm) when extended, retracts into body of floodlight
- Hook diameter: 1" (2.5 cm)
- Magnets: 2 co-planar, nickel-plated, neodymium rare-earth magnets
- Charger: Smart switching charger,
 120 VAC with standard "Type A", 2 prong plug
- Recharge time: About 6 hours





