


MACHINE SCREWS



- **Precision, Burr-Free Threads For Exact Fit**
- **Available in All Popular Head Styles Including: Binding, Round, Flat, Truss and Fillister**
- **Phillips and Slotted Drive**
- **Full Line of Specialty Nuts and Washers**
- **Special Chromate Plating**

CHROMATE MACHINE SCREWS, NUTS AND WASHERS PROVIDE CONSISTENT QUALITY AND RELIABILITY. Stronger head and deeper recess assures a fast, sure drive without stripping. Special chromate plating provides corrosion resistance and durability. Chromate Machine Screws outperform the others, time and time again.

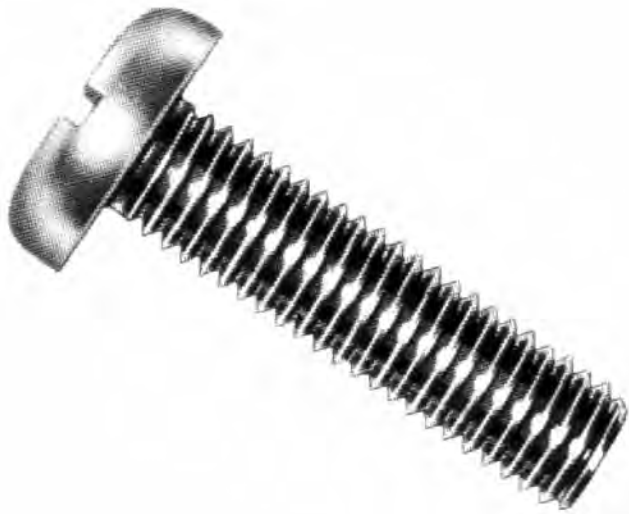

CHROMATE INDUSTRIAL CORP.


EXCEPTIONAL PRODUCTS, SERVICE AND INNOVATIVE SOLUTIONS

CIC 200™ SUPER MACHINE SCREWS

STRENGTH AND DURABILITY UNMATCHED BY ANY OTHER MACHINE SCREW

Special Chromate plating provides for fast, smooth installation and easy, corrosion-free removal.

- 120,000 PSI MINIMUM TENSILE STRENGTH
- EXCEEDS GRADE 5 CAP SCREW STRENGTH SPECIFICATIONS
- SUPER TOUGH THROUGH-HARDENING PROCESS
- REDUCES POSSIBILITY OF SNAPPING, SHEARING, STRETCHING OR BENDING
- COMBINATION PHILLIPS AND SLOTTED HEAD
- ASSURES YOU HAVE THE RIGHT SCREWDRIVER EVERY TIME
- HEAT TREATED AND BAKED OUT
- TO PREVENT DISTORTING SLOTTED/PHILLIPS DRIVE
- BLUE ZINC DICHROMATE PLATING
- FOR CORROSION RESISTANCE AND LONG LIFE




MADE IN U.S.A.

SIZE	PART	SIZE	PART	SIZE	PART
6-32 x 1/4	U 56111	-	-	10-24 x 1	T 56165
6-32 x 3/8	U 56112	8-32 x 1-1/2	T 56128	10-24 x 1-1/4	T 56166
6-32 x 1/2	U 56113	-	-	10-24 x 1-1/2	T 56167
6-32 x 5/8	U 56114	10-32 x 1/4	U 56131	10-24 x 2	T 56169
6-32 x 3/4	U 56115	10-32 x 3/8	U 56132	10-24 x 2-1/2	T 56170
6-32 x 1	U 56116	10-32 x 1/2	U 56133	10-24 x 2-3/4	T 56172
6-32 x 1-1/4	U 56117	10-32 x 5/8	U 56134	1/4-20 x 1/2	U 56150
6-32 x 1-1/2	U 56118	10-32 x 3/4	U 56135	1/4-20 x 5/8	T 56151
6-32 x 2	T 56119	10-32 x 1	U 56136	1/4-20 x 3/4	T 56152
8-32 x 1/4	U 56121	10-32 x 1-1/2	T 56138	1/4-20 x 1	T 56153
8-32 x 3/8	U 56122	10-32 x 2	T 56139	1/4-20 x 1-1/4	T 56154
8-32 x 1/2	U 56123	10-24 x 3/8	U 56161	1/4-20 x 1-1/2	T 56155
8-32 x 5/8	U 56124	10-24 x 1/2	U 56162	1/4-20 x 2	T 56156
8-32 x 3/4	U 56125	10-24 x 5/8	U 56163	1/4-20 x 2-1/2	R 56157
8-32 x 1	U 56126	10-24 x 3/4	U 56164	1/4-20 x 3	R 56158

SLOTTED MACHINE SCREWS

BINDING HEAD

- PRECISION, BURR-FREE THREADS FOR EXACT FIT
- SPECIAL CHROMATE PLATING ELIMINATES RUST AND CORROSION FOR EASIER REMOVAL




LENGTH	4-40	6-32	8-32	10-32	10-24	1/4-20
1/4	T 301	T 310	T 321	T 334	T 347	-
3/8	T 302	T 311	T 322	T 335	T 348	-
1/2	T 303	T 312	T 323	T 336	T 349	T 372
5/8	T 304	T 313	T 324	T 337	T 350	T 373
3/4	T 305	T 314	T 325	T 338	T 351	T 374
7/8	T 306	T 315	T 326	T 339	T 352	-
1	T 307	T 316	T 327	T 340	T 353	T 376
1-1/4	-	T 317	T 328	T 341	T 354	R 377
1-1/2	-	T 318	R 329	R 342	R 355	R 378
1-3/4	-	R 319	R 330	R 343	R 356	R 379
2	-	R 320	R 331	R 344	R 357	R 380
2-1/2	-	-	R 332	R 345	R 358	-
3	-	-	R 333	R 346	R 359	R 382

SLOTTED MACHINE SCREWS (Cont'd.)

ROUND HEAD


- PRECISION, BURR-FREE THREADS FOR EXACT FIT
- SPECIAL CHROMATE PLATING ELIMINATES RUST AND CORROSION FOR EASIER REMOVAL




LENGTH	6-32	8-32	10-24	10-32	12-24	1/4-20	5/16-18	3/8-16	1/2-13
1/4	-	T 1730	-	-	-	T 1716	-	-	-
5/16	-	-	-	-	T 1768	-	-	-	-
3/8	-	T 1732	-	T 1765	-	T 1714	-	-	-
1/2	-	-	-	T 1766	T 1774	T 1771	R 1727	-	-
5/8	T 1706	-	-	-	T 1775	-	R 1729	-	-
3/4	-	R 1734	-	T 1767	T 1776	T 1772	R 1731	-	-
7/8	-	-	-	-	-	-	-	-	-
1	T 1708	R 1736	T 1712	R 1783	T 1777	R 1773	R 1733	-	-
1-1/4	-	-	T 1770	-	T 1778	-	R 1735	-	-
1-1/2	-	R 1740	-	R 1722	T 1779	-	R 1737	-	-
1-3/4	-	-	-	R 1724	T 1780	-	R 1738	-	-
2	R 1705	-	-	-	T 1781	-	R 1739	N 1782	-
2-1/2	-	-	-	-	-	R 1718	R 1741	-	-
3	R 1707	-	R 1711	-	-	R 1719	R 1743	N 1750	-
4	R 1709	-	R 1713	R 1720	-	R 1721	N 1745	N 1751	I 1754
5	-	-	R 1715	-	-	N 1723	N 1747	N 1752	I 1755
6	-	-	R 1717	-	-	N 1725	N 1749	N 1753	I 1756

FLAT HEAD

- PRECISION, BURR-FREE THREADS FOR EXACT FIT
- SPECIAL CHROMATE PLATING ELIMINATES RUST AND CORROSION FOR EASIER REMOVAL




TRUSS HEAD



LENGTH	4-40	6-32	8-32	10-32	10-24	12-24	1/4-20	5/16-18	3/8-16	10-24	1/4-20
1/4	T 401	T 410	T 421	T 434	T 447	-	-	-	-	-	-
3/8	T 402	T 411	T 422	T 435	T 448	T 462	-	-	-	-	-
1/2	T 403	T 412	T 423	T 436	T 449	T 463	T 472	T 1827	T 1863	T 2660	T 2674
5/8	-	T 413	T 424	T 437	T 450	-	T 473	T 1829	-	-	T 2676
3/4	T 405	T 414	T 425	T 438	T 451	T 465	T 474	T 1831	T 1864	T 2664	T 2678
7/8	-	T 415	T 426	T 439	T 452	-	T 475	-	-	-	-
1	T 407	T 416	T 427	T 440	T 453	T 466	T 476	T 1833	T 1865	T 2666	T 2680
1-1/4	T 408	T 417	T 428	R 441	R 454	R 467	R 477	R 1835	R 1866	T 2668	T 2682
1-1/2	T 409	T 418	R 429	R 442	R 455	R 468	R 478	R 1837	R 1877	T 2670	T 2684
1-3/4	-	R 419	R 430	R 443	R 456	-	R 479	-	-	-	-
2	-	R 420	R 431	R 444	R 457	R 470	R 480	R 1839	R 1878	T 2672	T 2686
2-1/2	-	T 471	R 432	R 445	R 458	-	R 481	R 1841	-	-	-
3	-	R 1807	R 433	R 446	R 459	-	R 482	R 1843	R 1879	-	-
4	-	-	N 461	-	R 1813	-	R 1821	R 1845	R 1880	T 2673	-
5	-	-	-	-	-	-	N 1823	-	-	-	-
6	-	-	-	-	-	-	N 1825	-	-	-	-

SLOTTED MACHINE SCREWS (Cont'd.)

SLOTTED FILLISTER HEAD



LENGTH		4-40		6-32		8-32		10-32		10-24		12-24		1/4-20
1/4	U	501	U	510	U	521		-		-		-		-
3/8	U	502	U	511	U	522	U	535	U	548		-		-
1/2	U	503	U	512	U	523	U	536	U	549	U	562	U	572
5/8	U	504	U	513	U	524	U	537		-	U	563	U	573
3/4	U	505	U	514	U	525	U	538	U	551	U	564	U	574
7/8		-		-		-		-		-		-	T	575
1	U	507	U	516	U	527	U	540	U	553	U	566	T	576
1-1/4		-	U	517	U	528	U	541	U	554	T	567	T	577
1-1/2		-	U	518	U	529	T	542		-	T	568	T	578
1-3/4		-		-		-	T	543		-		-		-
2		-		-		-		-	T	557		-	T	580

15

COMBINATION SLOTTED/PHILLIPS MS

ROUND COMBINATION



TRUSS COMBINATION




LENGTH		6-32		10-24		1/4-20		3/8-16		6-32		10-24		1/4-20
2	T	26220	T	26223		-		-	T	26243	T	26246		-
3	T	26221	T	26224	T	26228		-	T	26244	T	26247	T	26249
4	T	26222	T	26225	T	26229	R	26237	T	26245	T	26248	R	26250
5		-	T	26226		-		-		-		-		-
6		-		-	R	26231		-		-		-		-

LICENSE PLATE SCREWS WITH HEX NUTS

UNIVERSAL SIZES FIT MOST APPLICATIONS

SCREWS AND NUTS

- LARGE, SLOTTED PAN HEAD MACHINE SCREWS SECURELY HOLD LICENSE PLATES TO BRACKETS OR HOLDERS
- PRECISION THREADS AND CHROMATE PLATING ELIMINATES RUST AND CORROSION ASSURING EASY REMOVAL




LENGTH		1/4 DIA.	LENGTH		1/4 DIA.
1/2	U	3886	3/4	T	3888
5/8	T	3887	-		-

PHILLIPS MACHINE SCREWS

PRECISION, BURR-FREE THREADS FOR EXACT FIT

For faster application without slippage using a screw gun, drill motor or screwdriver.
Special Chromate plating eliminates rust and corrosion for easier removal.


PAN HEAD





LENGTH	4-40	6-32	8-32	10-24	10-32	12-24	1/4-20
1/4	T 26101	T 26111	T 26121	T 26160	T 26131	T 26195	-
3/8	T 26103	T 26112	T 26122	T 26161	T 26132	T 26196	T 26148
1/2	T 26105	T 26113	T 26123	T 26162	T 26133	T 26197	T 26150
5/8	T 26107	T 26114	T 26124	T 26163	T 26134	T 26198	T 26149
3/4	T 26108	T 26115	T 26125	T 26164	T 26135	T 26199	T 26151
1	T 26110	T 26116	T 26126	T 26165	T 26136	T 26200	R 26152
1-1/4	T 26186	T 26117	R 26127	R 26166	R 26137	R 26201	R 26153
1-1/2	T 26187	R 26118	R 26128	R 26167	R 26138	R 26202	R 26154
1-3/4	T 26188	R 26119	R 26129	R 26168	R 26139	R 26203	-
2	T 26189	R 26120	R 26130	R 26169	R 26140	R 26204	R 26156
2-1/2	T 26190	R 26191	R 26180	R 26172	R 26142	-	R 26157
3	-	R 26192	R 26182	R 26175	R 26145	N 26205	R 26159
3-1/2	-	R 26193	N 26183	N 26176	N 26146	-	N 26206
4	-	R 26194	N 26184	N 26177	N 26147	-	N 26207
4-1/2	-	-	-	N 26178	-	-	-
5	-	-	N 26185	N 26179	-	-	-

FLAT HEAD

OVAL HEAD



PART NUMBER MARKED WITH ASTERISK ARE "UNDERCUT" FOR USE WITH METAL FRAME DOORS











LENGTH	4-40	6-32	8-32	10-24	10-32	12-24	1/4-20	6-32	8-32	10-24	10-32	1/4-20
1/4	T 36104	T 36111	T 36121*	-	-	-	-	-	-	-	-	-
3/8	T 36105	T 36112	T 36122	T 36161	T 36132	R 36185*	T 36148	T 46112	T 46122	T 46161	T 46132	-
1/2	T 36106	T 36113	T 36123	T 36162	T 36133	R 36186*	T 36150	T 46113	T 46123	T 46162	T 46133	T 46150
5/8	T 36107	T 36114	T 36124	T 36163	T 36134	R 36187	T 36149	T 46114	T 46124	T 46163	T 46134	-
3/4	T 36108	T 36115	T 36125	T 36164	T 36135	R 36188	T 36151	T 46115	T 46125	T 46164	T 46135	T 46151
1	T 36109	T 36116	T 36126	T 36165	T 36136	R 36189	R 36152	T 46116	T 46126	T 46165	T 46136	T 46152
1-1/4	-	-	R 36127	R 36166	R 36137	R 36190	R 36153	-	-	-	-	R 46153
1-1/2	T 36110	T 36117	R 36128	R 36167	R 36138	R 36191	R 36154	-	-	-	-	R 46154
1-3/4	-	-	R 36129	R 36168	R 36139	R 36192	R 36155	-	-	-	-	-
2	-	T 36118	R 36130	R 36169	R 36140	R 36193	R 36156	-	-	-	-	R 46156
2-1/2	-	T 36119	R 36180	R 36172	R 36142	R 36194	R 36157	-	-	-	-	-
3	-	T 36120	R 36182	R 36175	R 36145	R 36195	R 36159	-	-	-	-	-
3-1/2	-	-	-	N 36176	N 36146	-	-	-	-	-	-	-
4	-	-	-	N 36177	N 36147	-	N 36196	-	-	-	-	-
4-1/2	-	-	-	-	-	-	N 36197	-	-	-	-	-
5	-	-	-	-	-	-	N 36198	-	-	-	-	-
6	-	-	-	N 36178	-	-	N 36199	-	-	-	-	-





MACHINE SCREW NUTS, LOCKNUTS, SPRING NUTS

SPECIALTY NUTS FOR ALL MACHINE SCREW APPLICATIONS

Precision burr-free threads and special Chromate plating provides for fast, smooth installation and easy, corrosion-free removal.

HEX MACHINE NUTS		NYLON LOCKNUTS		WING NUTS		PRONG TEE NUTS	
							
SIZE	PART	SIZE	PART	SIZE	PART	SIZE	PART
2-56	T 5189	4-40	T 6000	4-40	R 5131	6-32	T 6960
3-48	T 5190	6-32	T 6005	6-32	T 5130	8-32	T 6964
4-40	T 5195	8-32	T 6010	8-32	T 5135	10-24	T 6968
5-40	T 5198	10-24	T 6015	10-24	T 5142	10-32	T 6970
6-32	T 5200	10-32	T 5015	10-32	T 5140	1/4-20	T 6974
8-32	T 5205	12-24	T 6017	12-24	R 5144	5/16-18	R 6978
10-24	T 5210	1/4-20	T 6020	1/4-20	R 5145	3/8-16	R 6982
10-32	T 6210	5/16-18	T 6025	5/16-18	R 5150	-	-
12-24	T 5220	3/8-16	T 6030	3/8-16	N 5155	-	-
1/4-20	T 5225	-	-	1/2-13	N 5156	-	-
5/16-18	T 5230	-	-	5/8-11	E 5157	-	-
-	-	-	-	3/4-10	E 5158	-	-







CAP NUTS		KEP NUTS		FLANGRIP LOCKNUTS		SQUARE MACH. NUTS	
							
SIZE	PART	SIZE	PART	SIZE	PART	SIZE	PART
6-32	T 6930	4-40	T 6901	8-32	T 5241	4-40	T 62900
8-32	T 6934	6-32	T 6900	10-24	T 6965	6-32	T 62901
10-24	T 6938	8-32	T 6904	1/4-20	T 6990	8-32	T 62902
10-32	T 6940	10-24	T 6908	5/16-18	T 6995	10-24	T 62903
1/4-20	T 6944	10-32	T 6912	3/8-16	T 6998	10-32	T 62904
5/16-18	R 6948	12-24	T 6913	7/16-14	R 5247	12-24	T 62905
3/8-16	R 6950	1/4-20	T 6914	1/2-13	R 5248	-	-
1/2-13	N 6954	5/16-18	R 6916	-	-	-	-
-	-	3/8-16	R 6920	-	-	-	-

STEEL SPRING NUTS FOR MACHINE SCREWS							
							
SIZE	PART	SIZE	PART	SIZE	PART	SIZE	PART
6-32	T 62501	6-32	T 62510	8-32	T 62526	-	-
8-32	T 62503	8-32	T 62515	10-24	T 62528	-	-
10-24	T 62504	10-24 (9/16")	T 62519	-	-	-	-
10-32	T 62505	10-24 (15/16")	T 62524	-	-	-	-

MACHINE SCREW WASHERS

SPECIALTY WASHERS FOR ALL MACHINE SCREW APPLICATIONS





Precision stamped to exacting tolerances. Special Chromate plating for durability.

USS WIDE BAND FLATWASHERS				SAE NARROW BAND FLATWASHERS				SPRING TEMPERED LOCK WASHERS				COUNTERSUNK FINISHING WASHERS			
															
SIZE	USS	SIZE	SAE	SIZE	PART	SIZE	PART	SIZE	PART	SIZE	PART	SIZE	PART		
3/16 (#10)	U 66431	#4	U 31235	#4	U 71200	#6	U 71202	#6	U 291	#8	U 292	#10 (3/16)	U 293		
1/4	T 66432	#6	U 31236	#6	U 71204	#8	U 71206	#8	U 294	#12	U 295	1/4	U 295		
5/16	T 66433	#8	U 31237	#8	U 71208	1/4	U 71210	1/4	-	-	-	-	-		
3/8	T 66435	#10 (3/16)	U 31238	#10 (3/16)	U 71212	5/16	U 71212	5/16	-	-	-	-	-		
-	-	#12	U 31239	#12	U 71214	3/8	U 71214	3/8	-	-	-	-	-		
-	-	1/4	T 31240	1/4	-	-	-	-	-	-	-	-	-		
-	-	5/16	T 31242	5/16	-	-	-	-	-	-	-	-	-		
-	-	3/8	T 31244	3/8	-	-	-	-	-	-	-	-	-		
OVERSIZE FENDER WASHERS								XT FENDER WASHERS							
															
SIZE	O.D.	I.D.	PART	SIZE	O.D.	I.D.	PART	SIZE	THICKNESS	O.D.	I.D.	PART			
3/16	3/4	7/32	R 987	5/16	1-1/4	11/32	R 993	1/4	.120	1	9/32	N 23989			
3/16	1	7/32	R 990	5/16	1-1/2	11/32	R 994	1/4	.120	1-1/2	9/32	N 23992			
3/16	1-1/4	7/32	R 988	3/8	1-1/4	13/32	R 996	5/16	.120	1-1/4	11/32	N 23993			
1/4	1	9/32	R 989	3/8	1-1/2	13/32	R 995	5/16	.120	1-3/4	11/32	N 23994			
1/4	1-1/4	9/32	R 991	3/8	1-5/8	27/64	R 998	3/8	.120	1-1/4	13/32	N 23996			
1/4	1-1/2	9/32	R 992	1/2	2	17/32	R 997	3/8	.120	1-3/4	13/32	N 23995			
-	-	-	-	-	-	-	-	1/2	.120	2	13/32	N 23997			

STARWASHERS

HIGH CARBON SPRING TEMPERED STEEL FOR STRENGTH & RESILIENCY


Positive "spring action" keeps assemblies under tension, eliminating failures.

EXTERNAL			INTERNAL			COUNTERSUNK			INT. / EXT.		
											
SIZE	PART	SIZE	PART	SIZE	PART	SIZE	PART	SIZE	PART	SIZE	PART
#6	T 5101	#4	T 5170	-	-	#8	T 975	#8	T 975	#8	T 975
#8	T 5102	#6	T 5171	-	-	#10 (3/16)	T 976	#10 (3/16)	T 976	#10 (3/16)	T 976
#10 (3/16)	T 5103	#8	T 5172	#10 (3/16)	T 5160	1/4	R 978	1/4	R 978	1/4	R 978
#12	T 5104	#10 (3/16)	T 5173	#12	T 5161	5/16	R 979	5/16	R 979	5/16	R 979
1/4	T 5105	#12	T 5174	1/4	T 5162	3/8	R 980	3/8	R 980	3/8	R 980
5/16	T 5106	1/4	T 5175	-	-	7/16	R 981	7/16	R 981	7/16	R 981
3/8	T 5107	5/16	T 5176	-	-	1/2	R 982	1/2	R 982	1/2	R 982
7/16	T 5108	3/8	T 5177	-	-	5/8	R 983	5/8	R 983	5/8	R 983
1/2	T 5109	7/16	T 5178	-	-	-	-	-	-	-	-
-	-	1/2	T 5179	-	-	-	-	-	-	-	-
-	-	9/16	R 5180	-	-	-	-	-	-	-	-
5/8	R 5111	5/8	R 5181	-	-	-	-	-	-	-	-
3/4	R 5112	3/4	R 5182	-	-	-	-	-	-	-	-

HEX HEAD MACHINE SCREWS

INDENTED HEX HEAD

- INDENTED HEX HEAD AND CASE HARDENED STRENGTH OFFER SUPERIOR CLAMPING FORCE AND DURABILITY



LENGTH	6-32	8-32	10-24	10-32	12-24
1/4	T 23200	T 23209	T 23218	T 23229	T 23240
3/8	T 23201	T 23210	T 23219	T 23230	T 23241
1/2	T 23202	T 23211	T 23220	T 23231	T 23242
3/4	T 23203	T 23212	T 23221	T 23232	T 23243
1	T 23204	T 23213	T 23222	T 23233	T 23244
1-1/2	T 23205	T 23214	T 23223	T 23234	T 23245
2	T 23206	T 23215	T 23224	T 23235	T 23246
2-1/2	T 23207	T 23216	T 23225	T 23236	-
3	R 23208	R 23217	T 23226	R 23237	-
3-1/2	-	-	R 23227	R 23238	-
4	-	-	R 23228	R 23239	-

15


NYLON MACHINE SCREWS

6/6 NYLON

Nylon fasteners are tough, resistant to corrosion, lightweight and good electrical insulators.

HEX CAPS

- NON-CONDUCTIVE AND CORROSION RESISTANT
- RESISTS CHEMICALS AND SOLVENTS (EXCEPT MINERAL ACIDS)
- TEMPERATURE RANGE 0°F TO 300°F
- CONFORMS TO IRREGULAR SURFACES AND PROVIDES GOOD VIBRATION DAMPENING



LENGTH	1/4 DIA.		5/16 DIA.		3/8 DIA.		1/2 DIA.		5/8 DIA.	
	USS 20	USS 18	USS 18	USS 16	USS 16	USS 13	USS 13	USS 11	USS 11	
3/8	T 26600	-	-	-	-	-	-	-	-	
1/2	T 26601	R 26616	R 26632	R 26647	R 26662					
5/8	T 26602	-	-	-	-					
3/4	T 26603	R 26617	R 26633	R 26648	R 26663					
1	T 26604	R 26618	R 26634	R 26650	R 22664					
1-1/4	T 26605	R 26619	R 26635	R 26651	-					
1-3/8	-	R 26620	-	-	-					
1-1/2	T 26606	R 26621	R 26636	R 26652	R 26665					
2	T 26607	R 26622	R 26637	R 26653	I 26666					
2-1/2	T 26608	R 26623	N 26638	R 26654	I 26667					
3	T 26609	R 26624	N 26639	R 26655	I 26668					
3-1/2	N 26610	N 26625	I 26640	I 26656	E 26669					
4	N 26611	N 26626	I 26641	E 26657	E 26670					
4-1/2	N 26612	N 26627	I 26642	E 26658	E 26671					
5	N 26613	N 26628	I 26643	E 26659	E 26672					
5-1/2	I 26614	N 26629	I 26644	E 26660	E 26673					
6	I 26615	N 26630	I 26645	E 26661	E 26674					


NYLON MACHINE SCREWS (Cont'd.)

6/6 NYLON

Nylon fasteners are tough, resistant to corrosion, lightweight and good electrical insulators.

SLOTTED ROUND HEAD

- NON-CONDUCTIVE AND CORROSION RESISTANT
- RESISTS CHEMICALS AND SOLVENTS (EXCEPT MINERAL ACIDS)
- TEMPERATURE RANGE 0°F TO 300°F
- CONFORMS TO IRREGULAR SURFACES AND PROVIDES GOOD VIBRATION DAMPENING




LENGTH	6-32	8-32	10-24	10-32	1/4-20
1/8	–	T 26523	T 26542	T 26553	
1/4	T 26500	T 26525	T 26544	T 26555	T 26570
3/8	T 26502	T 26528	T 26546	T 26557	T 26572
1/2	T 26504	T 26530	T 26547	T 26559	T 26573
5/8	T 26506	T 26531	T 26548	T 26560	T 26574
3/4	T 26508	T 26532	T 26549	T 26561	T 26575
7/8	T 26509	T 26533	–	T 26563	T 26576
1	T 26510	T 26534	T 26550	T 26564	T 26577
1-1/4	T 26512	T 26536	T 26551	T 26566	T 26578
1-1/2	T 26513	T 26538	T 26552	T 26567	T 26579
1-3/4	T 26515	T 26539	–	T 26568	T 26580
2	T 26517	T 26541	–	T 26569	T 26581
2-1/2	–	–	–	–	T 26582
3	–	–	–	–	T 26583

NYLON NUTS AND WASHERS

FOR NYLON MACHINE SCREWS

NYLON HEX NUTS


- NON-CONDUCTIVE AND CORROSION RESISTANT
- RESISTS CHEMICALS AND SOLVENTS (EXCEPT MINERAL ACIDS)
- TEMPERATURE RANGE 0°F TO 300°F
- CONFORMS TO IRREGULAR SURFACES AND PROVIDES GOOD VIBRATION DAMPENING



SIZE	PART
6-32	T 26703
8-32	T 26705
10-24	T 26706
10-32	T 26707
1/4-20	T 26709
5/16-18	T 26711
3/8-16	R 26713
1/2-13	R 26718
5/8-11	N 26720

NYLON FLATWASHERS

- NON-CONDUCTIVE AND CORROSION RESISTANT
- RESISTS CHEMICALS AND SOLVENTS (EXCEPT MINERAL ACIDS)
- TEMPERATURE RANGE 0°F TO 300°F
- CONFORMS TO IRREGULAR SURFACES AND PROVIDES GOOD VIBRATION DAMPENING



SIZE	PART
#6	T 26730
#8	T 26731
#10	T 26732
1/4	T 26733
5/16	T 26734
3/8	R 26735
1/2	R 26736

PORTA-PAK *Specials*



ONE-WAY SCREW REMOVER/ INSTALLER P/N 19527

ONE-WAY SCREW REMOVER / INSTALLER

- Patented one way screw remover and installer
- Makes installation of one-way screws fast and easy
- Allen set screw for adjustment of bit depth (hex keys included)
- Use with corded or cordless screwguns and drills



QTY	WIRE CONNECTOR	PART #	QTY	WIRE CONNECTOR	PART #
1	#6 On Way Screw Remover/Installer	81325	1	#8 On Way Screw Remover/Installer	81326
1	#10 On Way Screw Remover/Installer	81327	1	#12 On Way Screw Remover/Installer	81328
1	#14 On Way Screw Remover/Installer	81329	5	Hex Keys	