




ONE-WAY SCREW REMOVER/ INSTALLER

P/N 19527


ONE-WAY SCREW REMOVER / INSTALLER

- Patented one way screw remover and installer
- Makes installation of one-way screws fast and easy
- Allen set screw for adjustment of bit depth (hex keys included)
- Use with corded or cordless screwguns and drills

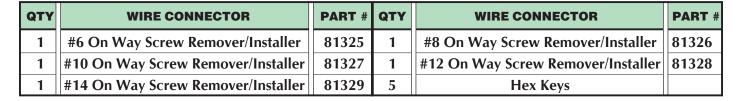




HD LOBULAR MAGNETIC NUTSETTERS P/N 19533

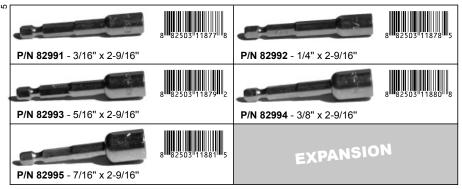

CHROMATE INDUSTRIAL CORP. • 1-800-BUY-BOLT • Fax: 631-567-2418 • www.chromate.com

MISCELLANEOUS SCREWS

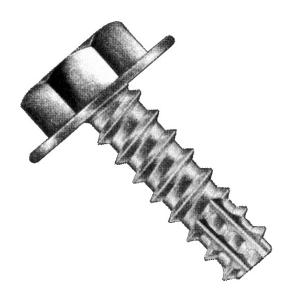

- High Performance
 Bi-Cut Screws
 For Plastic, Fiberglass,
 Wood and Masonite
- Drywall Screws
- Security Screws
- Thread Cutting Type F Point Screws
- Tamperproof
 Shoulder Screws
- Nutsetters, Bits and Bit Holders

CHROMATE SPECIALTY SCREWS HELP SOLVE ALL YOUR SPECIAL APPLICATION PROBLEMS. Designed and engineered for those unique situations where standard fasteners are inadequate. Look to Chromate for all your fastener needs.




CHROMATE INDUSTRIAL CORP.

DRIVER BITS

NUTSETTERS AND BITS FOR DRILLS AND SCREW GUNS

Made from shock resistant tool steel and heat treated for maximum strength and hardness. For longest life, always use the correct size bit for the screw you are driving.



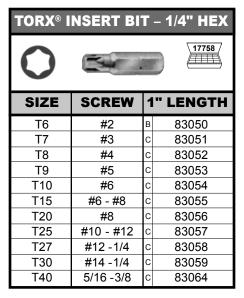





HD LOBULAR MAGNETIC NUTSETTERS - 1/4" HEX SHANK - S2 Tool Steel material, hardened with a proprietary coating - Lobular hex bit design minimizes the "rounding out" of the fastener head - Lobular design provides more clearance on the corners - Made in the USA


| SIZE | LENGTH | SCREW | I | PART |
|-------|---------|--------|---|--------|
| 3/16" | 2-9/16" | 2-4 | Α | 82991 |
| 1/4" | 2-9/16" | 6-8 | Α | 82992 |
| 5/16" | 2-9/16" | 10-12 | Α | 82993 |
| 3/8" | 2-9/16" | 14-1/4 | Α | 82994 |
| 7/16" | 2-9/16" | 14 | Α | 82995 |
| 1/4" | 6" | 6-8 | Α | 82980* |
| 5/16" | 6" | 10-12 | Α | 82981* |
| 3/8" | 6" | 14-1/4 | Α | 82982* |
| 3/16" | 1-5/8" | 2-4 | Α | 82983* |
| 1/4" | 1-5/8" | 6-8 | Α | 82984* |
| 5/16" | 1-5/8" | 10-12 | Α | 82985* |
| 3/8" | 1-3/4" | 6-8 | Α | 82986* |
| 7/16" | 1-3/4" | 14 | Α | 82987* |
| 1/4" | 4" | 6-8 | Α | 82988* |
| 5/16" | 4" | 10-12 | Α | 82989* |
| 3/8" | 4" | 14-1/4 | Α | 82990* |

* Items with an asterisk are non-stocking (10 day delivery ARO).



| NUTSETTER 1/4" HEX SHANK x 2-9/16" LONG | | | | | | | | | | |
|--|--------------|--------|-----------------|--------|----------------|--|--|--|--|--|
| | 17758 | | | | | | | | | |
| SIZE | SCREW | N | MAGNETIC | N | ION-MAG. | | | | | |
| | | | | | | | | | | |
| 1/4" | 6-8 | Α | 83005 | Α | 83015 | | | | | |
| 1/4" 5/16" | 6-8 10-12 | A A | 83005 83006 | A A | 83015 83016 | | | | | |
| | | Н | | H | | | | | | |








insert bits; magnetic for holding


| SHANK SIZE | LENGTH (OAL) | PART |
|------------|--------------|---------|
| 1/4" | 2" | A 83132 |
| 1/4" | 6" | A 83133 |
| 1/4" | 12" | A 83134 |
| 3/8" | 2" | A 83135 |
| 3/8" | 5-1/2" | A 83136 |
| 3/8" | 12" | A 83137 |
| 7/16" | 5-1/2" | A 83138 |
| 7/16" | 12" | A 83139 |
| 7/16" | 18" | A 83140 |





DRIVER BITS


NUTSETTERS AND BITS FOR DRILLS AND SCREW GUNS


















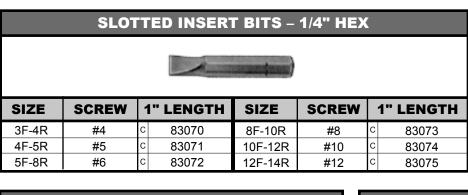



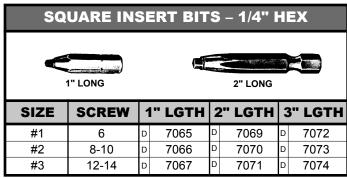

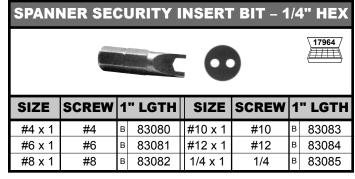

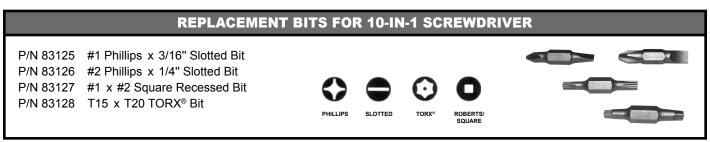



DRIVER BITS


NUTSETTERS AND BITS FOR DRILLS AND SCREW GUNS




| SIZE | SCREW | LENGTH | PART | | |
|---------------------|-----------------|--------|----------------|--|--|
| 1 Phil / 6 Slotted | 2-4 and 6-8 | 1-1/2 | c 83100 | | |
| 2 Phil / 4 Slotted | 5-10 and 4-6 | 1-1/2 | c 83101 | | |
| 3 Phil / 10 Slotted | 12-16 and 10-12 | 1-1/2 | c 83102 | | |

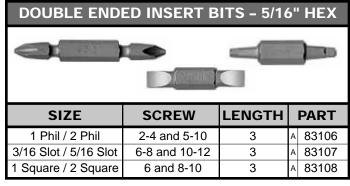

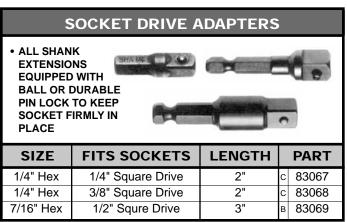

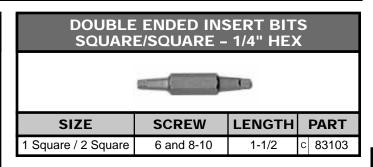

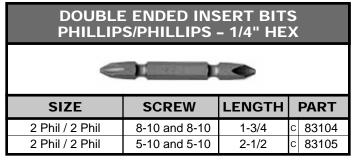


PHILLIPS / ACR BITS


- ACR OR ANTI CAM-OUT RECESS IS
 A SPECIALLY RIBBED TIP TO GRIP
 THE SCREW HEAD TIGHTLY
 REDUCING THE PRESSURE REQUIRED
 AND SLIPPAGE WHEN DRIVING OR REMO
 - AND SLIPPAGE WHEN DRIVING OR REMOVING SCREWS SPECIAL RIDGES HELP IN THE REMOVAL OF RUSTED.
- STRIPPED OR DAMAGED SCREW HEADS

 RIDGES ALSO HOLD THE SCREW ONTO THE BIT MAKING INSTALLATION EASIER AND LESS CHANCE OF DROPPING THE SCREW DURING REMOVAL

| 1" INSER | T BITS | 1-15/16" POWER BIT | | | | | |
|----------|--------|--------------------|-------|--|--|--|--|
| SIZE | PART | SIZE | PART | | | | |
| 6-8 | 83077 | 6-8 | 83087 | | | | |
| 8-10 | 83078 | 8-10 | 83088 | | | | |
| 12-14 | 83079 | 12-24 | 83089 | | | | |

CIC 200™ NUTSETTER AND BIT SETS

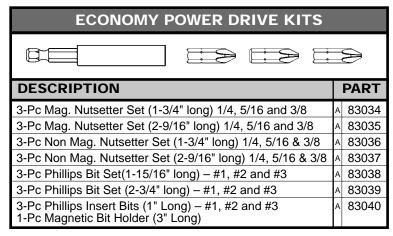

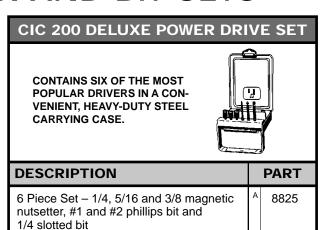

TORX® SECURITY SCREWS

TAMPER-RESISTANT / STAINLESS STEEL

BUTTON HEAD MACHINE SCREWS

18-8 STAINLESS STEEL



• For general purposes. With a lower crown and shallower recess than round head screws.



BUTTON HEAD SHEET METAL SCREWS

18-8 STAINLESS STEEL



• For general purposes. With a lower crown and shallower recess than round head screws.



| DIAMETER | LENGTH | | PART NO. | DRIVER SIZE | DIAN |
|----------|--------|---|----------|-------------|------|
| | 1/4 | R | 43800 | | |
| | 3/8 | R | 43801 | | |
| 4-40 | 1/2 | R | 43802 | T-8 | ; |
| | 3/4 | R | 43803 | | |
| | 1 | R | 43804 | | |
| | 1/4 | R | 43805 | | |
| | 3/8 | R | 43806 | | |
| | 1/2 | R | 43807 | | ; |
| 6-32 | 5/8 | R | 43808 | T-10 | |
| | 3/4 | R | 43809 | | |
| | 1 | R | 43810 | | |
| | 1-1/2 | R | 43811 | | |
| | 1/4 | R | 43812 | | |
| | 5/16 | R | 43813 | | # |
| | 3/8 | R | 43814 | | |
| | 1/2 | R | 43815 | | |
| 8-32 | 3/4 | R | 43816 | T-15 | |
| | 1 | N | 43817 | | |
| | 1-1/4 | N | 43818 | | |
| | 1-1/2 | N | 43819 | | # |
| | 1-3/4 | N | 43820 | | |
| | 2 | N | 43821 | | |
| | 3/8 | R | 43822 | | |
| | 1/2 | R | 43823 | | |
| | 5/8 | R | 43824 | | # |
| 10-24 | 3/4 | R | 43825 | T-25 | |
| | 1 | N | 43826 | | |
| | 1-1/4 | N | 43827 | | |
| | 1-1/2 | N | 43828 | | |
| | 3/16 | R | 43829 | | |
| | 3/8 | R | 43830 | | |
| | 1/2 | R | 43831 | | |
| 10-32 | 5/8 | R | 43832 | T-25 | |
| | 3/4 | R | 43833 | | |
| | 1 | N | 43834 | | |
| | 1-1/4 | N | 43835 | | |
| | 1-1/2 | N | 43836 | | |
| | 1/4 | N | 43837 | | S |
| | 3/8 | N | 43838 | | |
| | 1/2 | N | 43839 | | |
| | 5/8 | N | 43840 | | |
| | | | | | |

43841

43842

43843

43844

43845

43846

43847

N

N

N

N

| DIAMETER | LENGTH | | PART NO. | DRIVER SIZE |
|----------|--------|---|----------|-------------|
| | 1/2 | R | 43850 | |
| | 3/4 | R | 43851 | |
| #6 | 1 | N | 43852 | T-10 |
| | 1-1/2 | N | 43853 | |
| | 2 | N | 43854 | |
| | 3/8 | R | 43855 | |
| | 1/2 | R | 43856 | |
| #8 | 3/4 | R | 43857 | T-15 |
| | 1 | N | 43858 | |
| | 1-1/3 | N | 43859 | |
| | 1-1/2 | N | 43860 | |
| | 1/2 | R | 43861 | |
| | 5/8 | R | 43862 | |
| #10 | 3/4 | R | 43863 | T-25 |
| | 1 | N | 43864 | |
| | 1-1/4 | N | 43865 | |
| | 1-1/2 | N | 43866 | |
| | 1/2 | R | 43867 | |
| | 3/4 | R | 43868 | |
| #12 | 1 | N | 43869 | T-27 |
| | 1-1/4 | N | 43870 | |
| | 1-1/2 | N | 43871 | |
| | 1/2 | N | 43872 | |
| | 3/4 | N | 43873 | |
| #14 | 1 | N | 43874 | T-27 |
| | 1-1/4 | N | 43875 | |
| | 1-1/2 | N | 43876 | |
| | 2 | N | 43877 | |

TORX® INSERT BITS





| SIZE | SCREW SIZE | PART NO. | | | | |
|------|------------|----------|-------|--|--|--|
| T8 | #4 | В | 83099 | | | |
| T9 | #5 - #6 | В | 83091 | | | |
| T10 | #6 - #8 | В | 83092 | | | |
| T15 | #8 - #10 | В | 83093 | | | |
| T20 | #8 | В | 83094 | | | |
| T25 | #10 - #12 | В | 83095 | | | |
| T27 | #12 - 1/4 | В | 83096 | | | |
| T30 | #14 -1/4 | В | 83097 | | | |
| T40 | 5/16 - 3/8 | В | 83098 | | | |

1/4-20

3/4

1

1-1/4

1-1/2

1-3/4

2

2-1/2

T-27

TORX® SECURITY SCREWS

TAMPER-RESISTANT / STAINLESS STEEL

FLAT HEAD MACHINE SCREWS

18-8 STAINLESS STEEL



 Installs flush with metal surfaces or countersinks with softer materials for clean appearance.



| DIAMETER | LENGTH | | PART NO. | DRIVER SIZE | | |
|----------|--------|-----|----------|-------------|--|--|
| | 1/4* | R | 43880 | | | |
| | 3/8 | R | 43881 | | | |
| 6-32 | 1/2 | R | 43882 | T-10 | | |
| | 3/4 | R | 43883 | | | |
| | 1 | N | 43884 | | | |
| | 1-1/2 | N | 43885 | | | |
| | 1/4* | R | 43886 | | | |
| | 3/8 | R | 43887 | | | |
| | 1/2 | R | 43888 | | | |
| | 5/8 | R | 43889 | | | |
| 8-32 | 3/4 | R | 43890 | T-15 | | |
| | 1 | N | 43891 | | | |
| | 1-1/4 | N | 43892 | | | |
| | 1-1/2 | N | 43893 | | | |
| | 2 | N | 43894 | | | |
| | 3/8 | R | 43895 | | | |
| | 1/2 | R | 43896 | | | |
| 10-24 | 5/8 | R | 43897 | | | |
| | 3/4 | R | 43898 | T-20 | | |
| | 1 | N | 43899 | | | |
| | 1-1/4 | N | 43900 | | | |
| | 1-1/2 | N | 43901 | | | |
| | 3/8 | R | 43902 | | | |
| | 1/2 | R | 43903 | | | |
| 10-32 | 3/4 | R | 43904 | T-20 | | |
| | 1 | N | 43905 | | | |
| | 1-1/4 | N | 43906 | | | |
| | 1-1/2 | N | 43907 | | | |
| | 1/2* | N | 43908 | | | |
| 12-24 | 3/4 | N | 43909 | T-25 | | |
| | 1 | N | 43910 | | | |
| | 3/8* | N | 43911 | | | |
| | 1/2* | N | 43912 | 1 | | |
| | 5/8 | N | 43913 | | | |
| | 3/4 | N | 43914 | | | |
| 1/4-20 | 1 | N | 43915 | T-27 | | |
| • | 1-1/4 | N | 43916 | | | |
| | 1-1/2 | N | 43917 | 1 | | |
| | 1-3/4 | l N | 43918 | 7 | | |
| | 2 | N | 43919 | 1 | | |
| | 2-1/2 | I N | 43920 | - | | |

^{*} Undercut

FLAT HEAD SHEET METAL SCREWS

18-8 STAINLESS STEEL



 Installs flush with metal surfaces or countersinks with softer materials for clean appearance.



| DIAMETER | LENGTH | | PART NO. | DRIVER SIZE |
|----------|--------|---|----------|-------------|
| | 1/2 | R | 43925 | |
| | 5/8 | R | 43926 | |
| #6 | 3/4 | R | 43927 | T-10 |
| | 1 | R | 43928 | |
| | 1-1/2 | R | 43929 | |
| | 1/2 | R | 43930 | |
| | 5/8 | R | 43931 | |
| | 3/4 | R | 43932 | |
| #8 | 1 | R | 43933 | T-15 |
| | 1-1/4 | N | 43934 | |
| | 1-1/2 | N | 43935 | |
| | 2 | N | 43936 | |
| | 1/2 | R | 43937 | |
| | 3/4 | R | 43938 | |
| #10 | 1 | N | 43939 | T-20 |
| | 1-1/4 | N | 43940 | |
| | 1-1/2 | N | 43941 | |
| | 5/8 | N | 43942 | |
| | 3/4 | N | 43943 | |
| #14 | 1 | N | 43944 | T-30 |
| | 1-1/4 | N | 43945 | |
| | 1-1/2 | N | 43946 | |

PAN HEAD SELF DRILLING SHEET METAL SCREWS

410 STAINLESS STEEL



 Low profile large diameter head with a high-edged crown for increased strength.



| DIAMETER | LENGTH | | PART NO. | DRIVER SIZE |
|----------|--------|---|----------|-------------|
| | 1/2 | N | 43950 | |
| 8-18 | 3/4 | N | 43951 | T-20 |
| | 1 | N | 43952 | |
| | 1-1/4 | N | 43953 | |
| | 1/2 | N | 43954 | |
| | 3/4 | N | 43955 | |
| 10-16 | 1 | 1 | 43956 | T-25 |
| | 1-1/4 | Ι | 43957 | |
| | 1-1/2 | Ι | 43958 | |

CIC 200™ HEX-LOCK™ SECURITY SCREWS

TAMPER-RESISTANT STAINLESS STEEL



- 18-8 stainless steel for corrosion resistance and durability
- Prevents pilferage, vandalism and unauthorized access
- Unique hex key/pin lock design makes removal virtually impossible without specially machined keys
- Use for computers, videos, typewriters and office equipment; alarm systems, smoke detectors and lighting; bathroom fixtures and faucets; auditorium seats; benches; traffic lights; industrial safety guards; exhibits and displays; window and door locks; switch plates; hotel radios, clocks and televisions; thermostats and hundreds more

| | MACHINE SCREWS | | | | | | SHEET METAL SCREWS | | | | | | | | | |
|--------|----------------|-------|---|-------|---|-------|--------------------|-------|---|--------|---|-------|---|-------|---|--------|
| LENGTH | | 6-32 | | 8-32 | | 10-24 | | 10-32 | | 1/4-20 | | NO. 6 | | NO. 8 | | NO. 10 |
| 1/4 | | _ | | _ | | _ | | _ | | | | _ | | _ | | |
| 3/8 | R | 44101 | | _ | | _ | | _ | | _ | R | 44000 | R | 44006 | | |
| 1/2 | R | 44102 | R | 44110 | R | 44119 | R | 44127 | | _ | R | 44001 | R | 44007 | R | 44014 |
| 5/8 | | _ | | _ | | _ | | _ | | _ | | _ | | _ | | _ |
| 3/4 | R | 44104 | R | 44112 | R | 44121 | R | 44129 | R | 44137 | R | 44003 | R | 44009 | R | 44016 |
| 1 | | _ | R | 44113 | R | 44122 | R | 44130 | R | 44138 | R | 44004 | R | 44010 | R | 44017 |
| 1-1/4 | R | 44106 | | _ | | _ | | _ | | | | _ | R | 44011 | R | 44018 |
| 1-1/2 | | _ | R | 44115 | | _ | | _ | R | 44140 | | _ | R | 44012 | R | 44019 |
| 2 | | _ | | _ | | _ | | _ | | _ | | _ | | _ | R | 44020 |

CIC 200™ HEX-LOCK SECURITY DRIVERS AND NUTS

Hex-Lock drivers are the only tools for installing or removing Hex-Lock security screws. Break-away nuts have a pre-designed break-away torque that leaves a tamper-resistant nut on machine screws.

HEX-LOCK DRIVER BITS



| SIZE | SCREW | | PART |
|------|----------------|---|-------|
| 3/32 | 4-40 | В | 44203 |
| 1/8 | 6-32 | D | 44204 |
| 5/32 | 8-32 to 1/4-20 | D | 44206 |
| 3/16 | 5/16 | В | 44207 |
| 7/32 | 3/8 | В | 44208 |

HEX-LOCK KEYS



| SIZE | SCREW | PART | | | |
|------|----------------|------|-------|--|--|
| 1/8 | 6-32 | D | 44200 | | |
| 5/32 | 8-32 to 1/4-20 | D | 44202 | | |

BREAK-AWAY NUTS





| SIZE | BREAK-OFF TORQUE | | PART |
|--------|---------------------|---|-------|
| 10-24 | 25-35 in. lbs. | R | 44190 |
| 1/4-20 | 60-80 in. lbs. | R | 44194 |

17884

IIII

CIC 200™ THREAD CUTTING SCREWS

ELIMINATES EXPENSIVE TAPPING COSTS

Specially designed to thread their own hole through strong, sharp threads with a minimum amount of torque. The type F point provides cleaner threads and positive chip ejection.

SLOTTED HEX WASHER HEAD WITH TYPE F POINT

SLOTTED, INDENTED HEX WASHER HEAD PROVIDES FOR INSTALLATION VERSATILITY



THREAD CUTTING SLOTS PROVIDE POSITIVE CHIP EJECTION

FEATURES:

- Eliminates expensive tapping costs
- · One side installation with no need for nuts
- Special hardening process provides maximum resistance to breakage
- Washer head provides an even load bearing surface

| LENGTH | | 6-32 | | 8-32 | | 10-24 | 10-32 | | 12-24 | | | 1/4-20 | | 5/16-18 | | 3/8-16 |
|--------|---|------|---|------|---|-------|-------|------|-------|------|---|--------|---|---------|---|--------|
| 1/4 | Т | 7033 | Т | 7038 | | _ | Γ | - | | _ | | _ | Γ | _ | П | |
| 3/8 | Т | 7034 | Т | 7039 | Т | 7004 | Т | 7046 | | _ | | _ | | _ | | |
| 1/2 | Т | 7035 | Т | 7040 | Т | 7005 | Т | 7007 | | _ | Т | 7009 | | _ | | |
| 3/4 | Т | 7036 | Т | 7041 | Т | 7006 | Т | 7008 | Т | 7054 | Т | 7011 | R | 7020 | N | 7026 |
| 1 | Т | 7037 | Т | 7000 | Т | 7042 | Т | 7047 | Т | 7055 | Т | 7012 | R | 7021 | N | 7027 |
| 1-1/4 | | _ | Т | 7001 | Т | 7043 | Т | 7048 | | _ | Т | 7010 | N | 7017 | N | 7028 |
| 1-1/2 | | _ | Т | 7002 | Т | 7044 | Т | 7049 | | _ | Т | 7013 | N | 7018 | N | 7029 |
| 2 | | _ | т | 7003 | Т | 7045 | Т | 7053 | Γ | _ | R | 7014 | N | 7019 | ı | 7030 |
| 2-1/2 | | _ | П | _ | | _ | | _ | Γ | _ | R | 7015 | N | 7024 | ı | 7031 |
| 3 | | - | | - | | - | | _ | | - | R | 7016 | N | 7025 | I | 7032 |

| RECO | RECOMMENDED DRILL SIZES FOR THREAD CUTTING SCREWS (60%) | | | | | | | | | | |
|-------|---|------------|---------|-------|------------|--|--|--|--|--|--|
| SCREW | DRILL | DRILL PART | SCREW | DRILL | DRILL PART | | | | | | |
| 6-32 | 34 | 10034 | 12-24 | 16 | 10016 | | | | | | |
| 8-32 | 29 | 10029 | 1/4-20 | 5 | 10005 | | | | | | |
| 10-24 | 23 | 10023 | 5/16-18 | G | 10207 | | | | | | |
| 10-32 | 20 | 10020 | 3/8-16 | 0 | 10215 | | | | | | |

TAMPERPROOF SCREWS

TRUSS HEAD BARREL NUTS AND SHOULDER SCREWS

BARREL NUTS



| SIZE | THREAD | PART |
|-----------|--------|---------|
| 1/4 x 1/2 | 10-24 | ⊺ 10634 |
| 1/4 x 5/8 | 10-24 | т 10636 |


SHOULDER SCREWS



| SIZE | THREAD | | PART |
|--------------|--------|---|-------|
| 1/4 x 15/16 | 10-24 | Т | 10650 |
| 1/4 x 1-1/16 | 10-24 | Т | 10652 |
| 1/4 x 1-3/16 | 10-24 | Т | 10654 |
| 1/4 x 1-5/16 | 10-24 | Т | 10656 |

TAMPERPROOF UN-DO-IT MANUAL DRIVER

| SIZE | SCREW | PART |
|------|-------|---------|
| #1 | 6-8 | A 20101 |
| #2 | 8-10 | A 20105 |
| #3 | 10-14 | A 20110 |




CIC 200™ THUMB SCREWS

THUMB SCREW KNOBS


Instantly produce any size/style thumb screw. Make thousands of different screw, knob and color combinations.

- ACETAL RESIN CONSTRUCTION FOR STRENGTH AND DURABILITY
- COLOR-CODED FOR EASY IDENTIFICATION
- FOUR STYLES ACCOMMODATE DIFFERENT LEVERAGE/SPEED REQUIREMENTS











EASY AS 1, 2, 3!

- 1. SELECT A THUMB SCREW KNOB.
- 2. SELECT A CIC 150 OR CIC 200 SOCKET HEAD CAP SCREW (SEE CATALOG SECTION 12).
- 3. PRESS TOGETHER IN VISE, PRESS OR WITH PLIERS.

| KNURLED KNOB | | | | | | | | | |
|----------------------------|--------|----------|-----------|---------|--|--|--|--|--|
| SOCKET HEAD CAP SCREW SIZE | COLOR | DIAMETER | THICKNESS | PART | | | | | |
| #4 | Black | 5/16 | 11/64 | R 44040 | | | | | |
| #4 | Red | 5/16 | 11/64 | R 44041 | | | | | |
| #6 | Black | 3/8 | 3/16 | R 44044 | | | | | |
| #6 | Red | 3/8 | 3/16 | R 44045 | | | | | |
| #8 | Black | 1/2 | 7/32 | R 44048 | | | | | |
| #8 | Red | 1/2 | 7/32 | R 44049 | | | | | |
| #10 | Black | 5/8 | 1/4 | R 44052 | | | | | |
| #10 | Red | 5/8 | 1/4 | R 44053 | | | | | |
| 1/4 | Black | 3/4 | 5/16 | R 44056 | | | | | |
| 1/4 | Red | 3/4 | 5/16 | R 44057 | | | | | |
| 1/4 | Black | 1 | 5/16 | и 44060 | | | | | |
| 1/4 | Red | 1 | 5/16 | N 44061 | | | | | |
| | ROSETT | E KNOB | | | | | | | |
| 1/4 | Black | 1-1/2 | 15/32 | L 44064 | | | | | |
| 1/4 | Red | 1-1/2 | 15/32 | ь 44065 | | | | | |
| 5/16 | Black | 1-1/2 | 13/32 | ь 44068 | | | | | |
| 5/16 | Red | 1-1/2 | 13/32 | ь 44069 | | | | | |
| 3/8 | Black | 1-1/2 | 15/32 | L 44072 | | | | | |
| 3/8 | Red | 1-1/2 | 15/32 | ь 44073 | | | | | |
| | TEE H | (NOB | | | | | | | |
| #10 | Black | 1 | 1/4 | R 44076 | | | | | |
| #10 | Red | 1 | 1/4 | R 44077 | | | | | |
| 1/4 | Black | 1-1/4 | 5/16 | R 44080 | | | | | |
| 1/4 | Red | 1-1/4 | 5/16 | R 44081 | | | | | |
| 5/16 | Black | 1-1/2 | 13/32 | R 44084 | | | | | |
| 5/16 | Red | 1-1/2 | 13/32 | R 44085 | | | | | |
| 3/8 | Black | 1-3/4 | 15/32 | R 44088 | | | | | |
| 3/8 | Red | 1-3/4 | 15/32 | N 44089 | | | | | |
| | "L" K | NOB | | | | | | | |
| #10 | Black | 9/16 | 11/32 | R 44092 | | | | | |
| #10 | Red | 9/16 | 11/32 | R 44093 | | | | | |
| 1/4 | Black | 11/16 | 7/16 | R 44096 | | | | | |
| 1/4 | Red | 11/16 | 7/16 | R 44097 | | | | | |

CIC 200™ BI-CUT SCREWS

PHILLIPS BINDING AND HEX WASHER HEAD

High performance double-thread design for plastic, fiberglass, wood, masonite and other low density materials. Lower driving torque, greater pull-out strength and maximum protection against stripping, cracking and splitting. High 30° and low 60° included angle threads.

| BINDING HEAD | | | | | | | | | HEX WASHER HEAD | | | | | | ΞÞ | SUGG. DRILL SIZE | | | |
|--------------|---|-------|---|-------|---|-------|---|--------|-----------------|-------|---|-------|---|-------|----|------------------|--------|-------|-------|
| | | | | | | | | | | | | | | | | | | | |
| LENGTH | I | NO. 4 | ı | NO. 6 | l | NO. 8 | N | IO. 10 | | NO. 4 | | NO. 6 | | NO. 8 | r | NO. 10 | SCREW | DRILL | PART |
| 1/4 | Т | 95000 | Т | 95006 | | - | | - | Т | 95100 | Т | 95106 | | - | | - | No. 4 | 5/64 | 91005 |
| 3/8 | Т | 95002 | Т | 95008 | Т | 95012 | | - | Т | 95102 | Т | 95108 | Т | 95112 | | - | No. 6 | 3/32 | 91006 |
| 1/2 | Т | 95004 | Т | 95010 | Т | 95014 | Т | 95018 | Т | 95104 | Т | 95110 | Т | 95114 | Т | 95118 | No. 8 | 1/8 | 91008 |
| 5/8 | | - | | - | | | Т | 95020 | | - | | - | | - | Т | 95120 | No. 10 | 9/64 | 91009 |
| 3/4 | | - | | - | Т | 95016 | Т | 95022 | | - | | - | Т | 95116 | Т | 95122 | - | - | - |

DRYWALL SCREWS

HEAVY FRAME - DRILL POINT

- ATTACHES DRYWALL, INSULATION BOARD, WOOD, ETC, TO 14-20 GAUGE METAL STUDS
- UNIQUE HEAD DESIGN **MINIMIZES PAPER BURRS**
- NO. 2 PHILLIPS DRIVE
- ZINC PLATED



| SIZE | PART | SIZE | PART |
|-----------|---------|-----------|---------|
| 6 x 1 | ⊺ 13036 | 8 x 2-3/8 | T 13042 |
| 6 x 1-1/4 | ⊺ 13038 | 8 x 2-5/8 | ⊺ 13044 |
| 6 x 1-5/8 | ⊺ 13040 | 8 x 3 | T 13046 |
| 7 x 1-7/8 | ⊺ 13041 | _ | _ |

LIGHT FRAME - "S" POINT

- ATTACHES DRYWALL TO 20-25 GAUGE STEEL
- UNIQUE HEAD DESIGN **MINIMIZES PAPER BURRS**
- NO. 2 PHILLIPS DRIVE
- ZINC PLA

| ATED | | | | | | |
|------|---|-------|-----------|------|-------|--|
| | ı | PART | SIZE | PART | | |
| | Т | 13043 | 8 x 2-1/2 | Т | 13020 | |
| , | т | 12045 | 0 v 2 | т | 12022 | |

| SIZE | PAF | RT | SIZE | | PART |
|-----------|-------|-----|------------|---|-------|
| 6 x 1 | ⊺ 130 |)43 | 8 x 2-1/2 | Т | 13020 |
| 6 x 1-1/8 | ⊺ 130 | 045 | 8 x 3 | Т | 13022 |
| 6 x 1-1/4 | ⊺ 130 |)47 | 10 x 3-1/2 | Т | 13026 |
| 7 x 2 | ⊺ 130 | 053 | 10 x 4 | Т | 13028 |
| 7 x 2-1/4 | ⊺ 130 | 056 | _ | | - |

DRYWALL SCREW SETTER

- SETS DRYWALL SCREW INTO DRYWALL
- EASY TO USE IN **DRILLS OR SCREW GUNS**



COARSE THREAD - YELLOW ZINC



- ATTACHES DRYWALL TO WOOD
- SUPERIOR HOLDING POWER
- EASY PENETRATION
- UNIQUE HEAD DESIGN MINIMIZES PAPER BURRS
- NO. 2 PHILLIPS DRIVE
- YELLOW ZINC PLATED FOR EASY IDENTIFICATION AND DURABILITY

| SIZE | PART | SIZE | PART |
|-----------|---------|------------|---------|
| 6 x 1 | т 13010 | 7 x 2-1/4 | ⊺ 13015 |
| 6 x 1-1/8 | T 13011 | 8 x 2-1/2 | T 13016 |
| 6 x 1-1/4 | T 13012 | 8 x 3 | T 13017 |
| 6 x 1-5/8 | ⊺ 13013 | 10 x 3-1/2 | T 13018 |
| 7 x 2 | 13014 | 10 x 4 | ⊺ 13019 |

COARSE THREAD - BLACK



- ATTACHES DRYWALL TO WOOD
- SUPERIOR HOLDING POWER
- EASY PENETRATION
- UNIQUE HEAD DESIGN MINIMIZES PAPER BURRS
- NO. 2 PHILLIPS DRIVE
- BLACK PHOSPHATE FINISH

| SIZE | PART | SIZE | PART |
|-----------|---------|------------|---------|
| 6 x 1 | x 13000 | 7 x 2-1/4 | w 13005 |
| 6 x 1-1/8 | x 13001 | 8 x 2-1/2 | v 13006 |
| 6 x 1-1/4 | X 13002 | 8 x 3 | v 13007 |
| 6 x 1-5/8 | x 13003 | 10 x 3-1/2 | т 13008 |
| 7 x 2 | W 13004 | 10 x 4 | ⊺ 13009 |

TRIM SCREWS

IDEAL FOR TRIM AND FINISH WORK

PHILLIPS DRIVE

- ATTACHES WOOD TRIM OVER SINGLE OR DOUBLE LAYER GYPSUM BOARD TO 20-25 GAUGE STEEL
- SUPERIOR HOLDING POWER
- EASY PENETRATION
- UNIQUE HEAD DESIGN MINIMIZES THE NEED TO FILL HOLES
- NO. 2 PHILLIPS DRIVE
- BLACK PHOSPHATE FINISH





| SIZE | PART |
|-----------|---------|
| 6 x 1-5/8 | т 13090 |
| 6 x 2-1/4 | т 13091 |

SQUARE DRIVE

- ATTACHES WOOD TRIM OVER SINGLE OR DOUBLE LAYER GYPSUM BOARD TO 20-25 GAUGE STEEL
- SUPERIOR HOLDING POWER
- EASY PENETRATION
- UNIQUE HEAD DESIGN MINIMIZES THE NEED TO FILL HOLES
- SQUARE DRIVE
- BLACK PHOSPHATE FINISH




| SIZE | PART | SIZE | PART |
|-----------|---------|-----------|---------|
| 6 x 1 | т 13092 | 6 x 2-1/4 | т 13094 |
| 6 x 1-5/8 | т 13093 | 8 x 3 | ⊺ 13095 |

CIC 200[™] SEX BOLTS

SMOOTH TRUSS HEADS - NO DRIVE

The knurled barrel keeps the sex bolt from spinning while the flat head screw is tightened from the other side. These parts are secure as there is no way to turn the sex bolt without a drive in the head. Mating screw is phillips flat head, steel and plated to match the finish on the barrel.

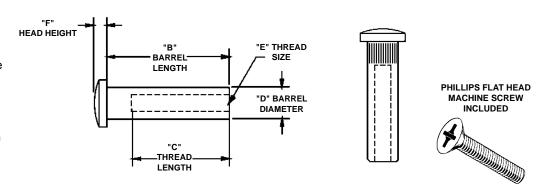

| | | | BRA | SS MATER | RIAL | | | | |
|-------------------------|-----------------------|----------------------|-----------------------|---------------------|---------------------|---------|----------------------------------|---|-------|
| D BARREL DIAMETER | B BARREL LENGTH | C THREAD DEPTH | A HEAD DIAMETER | F HEAD HEIGHT | E THREAD SIZE | PLATING | PHIL FLAT HD MACHINE SCREW | | PART |
| 5/16" | 1-3/16 | 3/4 | 1/2 | 1/8 | 10-32 | Chrome | 10-32 x 1 | Е | 10660 |
| 5/16" | 1-3/16 | 3/4 | 1/2 | 1/8 | 10-32 | Clear | 10-32 x 1 | Е | 10661 |
| 5/16" | 1-9/16 | 3/4 | 1/2 | 1/8 | 10-32 | Chrome | 10-32 x 1 | Е | 10663 |
| 5/16" | 1-9/16 | 3/4 | 1/2 | 1/8 | 10-32 | Clear | 10-32 x 1 | Е | 10664 |
| 3/8" | 1-9/16 | 1-1/4 | 9/16 | 5/32 | 1/4-20 | Chrome | 1/4-20 x 1-1/2 | Е | 10666 |
| 3/8" | 1-9/16 | 1-1/4 | 9/16 | 5/32 | 1/4-20 | Clear | 1/4-20 x 1-1/2 | Е | 10667 |
| | | | STAINLES | S STEEL I | MATERIAL | | | | |
| 5/16" | 1-3/16 | 3/4 | 1/2 | 1/8 | 10-32 | None | 10-32 x 1 | Е | 10662 |
| 5/16" | 1-9/16 | 3/4 | 1/2 | 1/8 | 10-32 | None | 10-32 x 1 | Е | 10665 |
| 3/8" | 1-9/16 | 3/4 | 9/16 | 5/32 | 1/4-20 | None | 1/4-20 x 1 | В | 10669 |
| 3/8" | 2-1/16 | 3/4 | 9/16 | 5/32 | 1/4-20 | None | 1/4-20 x 1 | В | 10670 |

ONE-WAY SCREW REMOVER / INSTALLER

MAKES INSTALLATION OF ONE-WAY SCREWS FAST AND EASY

- PATENTED ONE WAY SCREW REMOVER AND INSTALLER
- MAKES INSTALLATION OF ONE-WAY SCREWS FAST AND EASY
- ALLEN SET SCREW FOR ADJUSTMENT OF BIT DEPTH (HEX KEY INCLUDED)
- USE WITH CORDED OR CORDLESS SCREWGUNS AND DRILLS





| DESCRIPTION | FOR SCREW HEAD DIAMETER | | PART |
|---------------------------------------|-------------------------|---|-------|
| #6 One Way Screw Remover / Installer | .225" | А | 81325 |
| #8 One Way Screw Remover / Installer | .260" | А | 81326 |
| #10 One Way Screw Remover / Installer | .339" | А | 81327 |
| #12 One Way Screw Remover / Installer | .392" | А | 81328 |
| #14 One Way Screw Remover / Installer | .443" | A | 81329 |

SCREW GUIDES

MAGNET HOLDS AND GUIDES SCREWS IN THE CORRECT POSITION



- HIGH STRENGTH NEODYMIUM MAGNET
- HOLDS AND GUIDES SCREWS IN THE CORRECT POSITION WITHOUT WOBBLING OR DISENGAGING FROM THE BIT
- BODY OF SCREW GUIDE SPINS FREELY FOR IMPROVED STABILITY



1. Place correct size driver bit into Screw Guide. Then place screw on bit (the guide is magnetic and holds screw on driver bit).




2. Slide Screw Guide over screw to hold screw in place while driving.

| SIZE | OVERALL LENGTH | PART |
|----------|----------------|---------|
| Compact | 3-1/16" | c 83028 |
| Standard | 4-5/16" | A 83029 |

FLEX-A-BIT® FLEXIBLE EXTENSIONS

FLEX-A-BIT®

- THE ONLY FLEXIBLE EXTENSION WHERE THE ENTIRE **OUTER SURFACE DOES NOT ROTATE**
- FLEXES TO 90°
- USE IN HARD TO REACH PLACES IN CARS, KITCHEN CABINETS, **FURNITURE, APPLIANCES, ETC.**
- LIGHT DUTY IS RATED FOR 3.5 FOOT POUNDS OF TORQUE
- INDUSTRIAL DUTY IS RATED FOR 13 FOOT POUNDS OF TORQUE
- FLEX-A-BIT® PLUS IS DESIGNED FOR **USE IN ELECTRIC OR HEAVY DUTY RECHARGEABLE DRILLS**

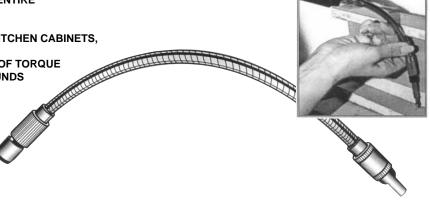

| DESCRIPTION | PART |
|---|---------|
| Flex-a-Bit® 7-1/2", Light Duty 1/4" Hex | A 83130 |
| Flex-a-Bit® Plus 11", Industrial Duty, 1/4" Hex | A 83131 |

SCREWDRIVERS

SECURITY SELECT-A-BIT 16-IN-1 MULTI-DRIVER

- 16 BITS IN THE HANDLE AND A 1/4" NUT DRIVER IN THE NOSEPIECE FOR MAXIMUM VERSATILITY
- EXTRA-LONG (3") DOUBLE ENDED BITS ARE MADE OF HARDENED S2 STEEL AND ARE UNIVERSALLY SIZED FOR SUPERIOR STRENGTH
- PATENTED END-CAP ALLOWS INDIVIDUAL BIT REMOVAL, YET WON'T TURN DURING USE
- INDUSTRIAL-QUALITY DRIVERS FOR LONG LIFE

SCREWDRIVER INCLUDES THESE SECURITY BITS:

- SPANNER 4, 6, 8 AND 10
- TORX® SECURITY 10, 15, 20 AND 25
- HEX SECURITY 1/8", 9/64", 5/32" AND 3/16"
- ROBERTS/SQUARE SECURITY 1 AND 2
- PHILLIPS 2 AND SLOTTED 7/32"













SECURITY







| DESCRIPTION | | PART | DESCRIPTION | PART | |
|-------------------------------|---|-------|----------------------------------|------|-------|
| Screwdriver | А | 8025 | Replacement Spanner 4-6 Bit | А | 83114 |
| Replacement Torx T10-T15 Bit | А | 83110 | Replacement Spanner 8-10 Bit | А | 83115 |
| Replacement Torx T20-T25 Bit | А | 83111 | Replacement Square 1-2 Bit | А | 83116 |
| Replacement Hex 3/16-5/32 Bit | А | 83112 | Replacement Phillips/Slotted Bit | А | 83117 |
| Replacement Hex 1/8-9/64 Bit | А | 83113 | | | |

PHILLIPS/

CHROMATE WOODER RIVER CORD:

SCREWDRIVERS

10-IN-1 SCREWDRIVER

- INCLUDES:
 - 2 PHILLIPS BITS
 - 2 SLOTTED BITS
 - 2 TORX® BITS
 - 2 SQUARE BITS
- SHAFT AND BIT HOLDER DOUBLE AS HEX DRIVERS
- BITS STORE CONVENIENTLY IN THE SHAFT WHEN NOT IN USE
- HIGH-IMPACT PLASTIC HANDLE
- 7.5" L X 1.0" W

The 10-in-1 Screwdriver includes these bits:

- · Phillips:
- #1 and #2 Slotted: 3/16" and 1/4"
- TORX®:

- T15 and T20
- · Roberts/Square: • HEX:
- #1 and #2 1/4" and 5/16"















HROMATE INDUSTRIAL CON 1-800-BUY-BOLT

| DESCRIPTION | | PART |
|---|---|-------|
| 10-in-1 Screwdriver | A | 8020 |
| #1 Phillips x 3/16" Slotted Bit - Replacement | A | 83125 |
| #2 Phillips x 1/4" Slotted Bit - Replacement | A | 83126 |
| #1 x #2 Square Recessed Bit - Replacement | A | 83127 |
| T15 x T20 TORX® Bit - Replacement | A | 83128 |

8-IN-1 MULTI-TOOL STUBBY SCREWDRIVER

- · Ideal for hard-to-reach areas
- Professional-grade tool includes seven (7) of the most common sized screwdriving bits
- · All bits are conveniently and securely stored inside the tool
- The shank functions as a 1/4" nut driver
- · Shank is magnetic, so bits are held securely in place
- Non-slip protouch™ grip, provides maximum torque, with incredible comfort and control



| DESCRIPTION | | PART |
|--------------------------------------|---|------|
| 8-in-1 Multi-Tool Stubby Screwdriver | А | 8028 |

SCREWDRIVERS

DIAL-N-LOAD AUTO SCREWDRIVER

- All high grade metal component construction
- Chemical and shock resistant plastics
- · Comfortable, attractive, anti-roll handle
- Rotating front collar for fine adjustment
- · Comes loaded with 6 commonly used industrial grade bits
- Phillips: PH1, PH2, PH3; Slotted: 1/8", 3/16", 1/4"
- No contact bit changes
- Bit loads can be fully customized (1" length bits only)
- · Bit tips are magnetic

Exclusive pump action mechanism changes bits within seconds



to "Click".



Point arrow to select bit.



Push forward to load bit.

31 Piece Bit Set - P/N 83129



Includes the following:

- Phillips: P0, P1, PHR2, P3
- Slotted: 5/32" (2 pieces), 7/32", 1/4", 9/32"
- TORX®: T10, T15, T20, T25, T27, T30, T40
- Square: 1, 2, 3
- Hex: 5/64", 3/32", 7/54", 1/8", 9/64", 5/32", 3/16", 7/32", 1/4"
- Quick change locking bit adapter (*bonus piece)
- * Not specifically intended as an extension to Dial-N-Load Auto Screwdriver... gives you flexibility to move back and forth with these bits in your driver and power tool.












P/N 8023

| DESCRIPTION | | PART |
|------------------------------|---|-------|
| Dial-N-Load Auto Screwdriver | А | 8023 |
| 31 Piece Bit Set | А | 83129 |



SCREWDRIVERS

COMPACT 7 PIECE SCREWDRIVER SET WITH BELT POUCH

Includes

- 3 Phillips bits (P/Ns 83172–83174)
- 3 Slotted bits (P/Ns 83175–83177)
- 1/4" Universal bit holder (P/N 83171)
- · Handle with integrated bit storage
- Belt pouch

Application


 Suitable for 1/4" DIN 3126-C 6.3 and E 6.3 (ISO 1173) hexagon socket insert bits

Features

- The miracle tool for manual and power tool applications
- Includes bits that can be stored in the handle
- 1/4" universal bit holder can be used as a power tool adaptor
- · Quick release chuck
- · Supplied in a rugged belt pouch

Benefits

- Screwdriver tip made from powerbit grade steel for unbeatable strength
- Handle uniquely fits the contour of hands during use
- · Handle has non-roll feature

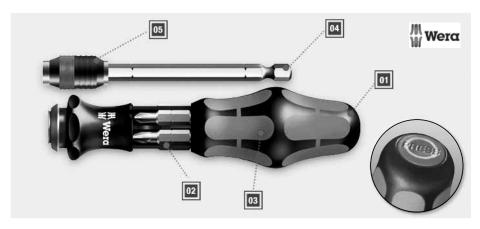

- Spring-loaded opening mechanism allows access to bit storage
- 6-bit magazine integrated in the handle
- Ergonomic, non-roll handle
- 1/4" universal bit holder that can be used as a power tool adaptor
- Ouick release chuck











| DESCRIPTION | PART |
|--------------------------------|---------|
| 7 Piece Screwdriver Set | A 83170 |
| 1/4" Universal Bit Holder | А 83171 |
| Phillips Bit - #1 | А 83172 |
| Phillips Bit - #2 | А 83173 |
| Phillips Bit - #3 | А 83174 |
| Slotted Bit - 0.6 x 4.5 x 25mm | А 83175 |
| Slotted Bit - 1.0 x 5.5 x 25mm | А 83176 |
| Slotted Bit - 1.2 x 6.5 x 25mm | А 83177 |

SCREWDRIVERS - INSULATED

1000V INSULATED SCREWDRIVER SET

• 18 Piece Set includes:

- Slotted
- Phillips
- Pozidriv
- PlusMinus/MCB
- Switchboard Cabinet Blades
- Individually tested for dielectric strength under a 10,000V load, to guarantee safe working at 1,000V (1000V AC and 1500V DC)
- Drop tested at extreme tempratures to ensure insulation won't fail
- Screwdriver tip made from powerbit grade steel for unbeatable strength
- VDE handle with blade auto-lok system
- Handle uniquely fits the hands contours during use
- Supplied in a rugged belt pouch
- Individual bits also sold separately









Set contents:

- 817 VDE Handle
- 1 Voltage Tester
- 4 Slotted Bits
- 2.5, 3.5, 4 and 5.5mm
- 2 Phillips Bits
- PH1 and PH2
- 2 Phillips Bits
- PHS1 and PHS2 minus blades for combination screws
- 2 Pozidriv Bits
- PZ1 and PZ2
- 2 Pozidriv Bits
- PZS1 and PZS2 minus blades for combination screws
- 4 Switchboard Cabinet Blades
- Square 6.3 and 8.1mm, triangular and round

| DESCRIPTION | | PART |
|---|---|-------|
| 1000V Insulated Screwdriver Set | А | 8029 |
| 817 VDE Handle | A | 83150 |
| Voltage Tester | A | 83151 |
| Slotted Bit - 2.5mm | A | 83152 |
| Slotted Bit - 3.5mm | A | 83153 |
| Slotted Bit - 4mm | A | 83154 |
| Slotted Bit - 5.5mm | A | 83155 |
| Phillips Bit - PH1 | A | 83156 |
| Phillips Bit - PH2 | A | 83157 |
| Phillips Bit - PHS1 minus blades for combination screws | A | 83158 |
| Phillips Bit - PHS2 minus blades for combination screws | A | 83159 |
| Pozidriv Bit - PZ1 | A | 83160 |
| Pozidriv Bit - PZ2 | A | 83161 |
| Pozidriv Bit - PZS1 minus blades for combination screws | A | 83162 |
| Pozidriv Bit - PZS2 minus blades for combination screws | A | 83163 |
| Switchboard Cabinet Blade - Square 6.3mm | А | 83164 |
| Switchboard Cabinet Blade - Square 8.1mm | А | 83165 |
| Switchboard Cabinet Blade - Triangular 8mm | А | 83166 |
| Switchboard Cabinet Blade - SI-Round 14mm | A | 83167 |