



























BRASS FLAT HEAD MACHINE SCREW ASSORTMENT WITH HEX NUTS P/N 7755

FEATURES:

- Brass fasteners are non-magnetic and have good corrosion resistance
- Min. Tensile 55,000 - 65,000 PSI

530

 6-32 NUTS P/N 21102	 8-32 NUTS P/N 21103	 10-32 NUTS P/N 21105	 10-24 NUTS P/N 21104	 10-24 x 1-1/4 P/N 47746	 1/4-20 x 3/4 P/N 47786
 6-32 x 1/2 P/N 47715	 8-32 x 1/2 P/N 47727	 10-32 x 1/2 P/N 47760	 10-24 x 1/2 P/N 47741	 10-24 x 1-1/2 P/N 47747	 1/4-20 x 1 P/N 47788
 6-32 x 3/4 P/N 4717	 8-32 x 3/4 P/N 47729	 10-32 x 3/4 P/N 47762	 10-24 x 3/4 P/N 47743	 1/4-20 NUTS P/N 21107	 1/4-20 x 1-1/4 P/N 47789
 6-32 x 1 P/N 47719	 8-32 x 1 P/N 47731	 10-32 x 1 P/N 47764	 10-24 x 1 P/N 47745	 1/4-20 x 1/2 P/N 47784	 1/4-20 x 1-1/2 P/N 47790

A32-1

TRAY FRONT



























BRASS ROUND HEAD MACHINE SCREW ASSORTMENT WITH HEX NUTS

P/N 7756

FEATURES:

- Brass fasteners are non-magnetic and have good corrosion resistance
- Min. Tensile 55,000 - 65,000 PSI

530

 6-32 NUTS P/N 21102	 8-32 NUTS P/N 21103	 10-32 NUTS P/N 21105	 10-24 NUTS P/N 21104	 10-24 x 1-1/4 P/N 37746	 1/4-20 x 3/4 P/N 37786
 6-32 x 1/2 P/N 37715	 8-32 x 1/2 P/N 37727	 10-32 x 1/2 P/N 37760	 10-24 x 1/2 P/N 37741	 10-24 x 1-1/2 P/N 37747	 1/4-20 x 1 P/N 37788
 6-32 x 3/4 P/N 37717	 8-32 x 3/4 P/N 37729	 10-32 x 3/4 P/N 37762	 10-24 x 3/4 P/N 37743	 1/4-20 NUTS P/N 21107	 1/4-20 x 1-1/4 P/N 37789
 6-32 x 1 P/N 37719	 8-32 x 1 P/N 37731	 10-32 x 1 P/N 37764	 10-24 x 1 P/N 37745	 1/4-20 x 1/2 P/N 37784	 1/4-20 x 1-1/2 P/N 37790

A322

TRAY FRONT



























SLOTTED PAN HEAD MACHINE SCREW ASSORTMENT 18-8 STAINLESS STEEL P/N 7757

FEATURES:

- Precision burr-free threads for exact fit
- Meets ANSI B18.6.3
- Minimum tensile 100,000-125,000 PSI
- Yield: 55,000-75,000 PSI
- Hardness: 100 Rockwell B

1370

 6-32 NUTS P/N 14332	 8-32 NUTS P/N 14334	 10-32 NUTS P/N 14336	 10-24 NUTS P/N 14338	 10-24 x 1-1/4 P/N 14812	 1/4-20 x 3/4 P/N 14832
 6-32 x 1/2 P/N 14724	 8-32 x 1/2 P/N 14746	 10-32 x 1/2 P/N 14770	 10-24 x 1/2 P/N 14804	 10-24 x 1-1/2 P/N 14814	 1/4-20 x 1 P/N 14834
 6-32 x 3/4 P/N 14728	 8-32 x 3/4 P/N 14750	 10-32 x 3/4 P/N 14774	 10-24 x 3/4 P/N 14808	 1/4-20 NUTS P/N 14300	 1/4-20 x 1-1/4 P/N 14836
 6-32 x 1 P/N 14730	 8-32 x 1 P/N 14752	 10-32 x 1 P/N 14776	 10-24 x 1 P/N 14810	 1/4-20 x 1/2 P/N 14828	 1/4-20 x 1-1/2 P/N 14838

A323

TRAY FRONT



























CIC 200™ 18-8 STAINLESS STEEL SLOTTED FLAT HEAD MACHINE SCREW ASSORTMENT WITH HEX NUTS

P/N 7758

FEATURES:

- 18-8 stainless steel - excellent in corrosive environments
- Meets ANSI B18.6.3
- Min. Tensile 100,000 - 125,000 PSI
- Yield – 55,000 - 75,000 PSI
- Hardness – 100 Rockwell B

1370

 6-32 NUTS P/N 14332	 8-32 NUTS P/N 14334	 10-32 NUTS P/N 14336	 10-24 NUTS P/N 14338	 10-24 x 1-1/4 P/N 15012	 1/4-20 x 3/4 P/N 15032
 6-32 x 1/2 P/N 14924	 8-32 x 1/2 P/N 14946	 10-32 x 1/2 P/N 14970	 10-24 x 1/2 P/N 15004	 10-24 x 1-1/2 P/N 15014	 1/4-20 x 1 P/N 15034
 6-32 x 3/4 P/N 14928	 8-32 x 3/4 P/N 14950	 10-32 x 3/4 P/N 14974	 10-24 x 3/4 P/N 15008	 1/4-20 NUTS P/N 14300	 1/4-20 x 1-1/4 P/N 15036
 6-32 x 1 P/N 14930	 8-32 x 1 P/N 14952	 10-32 x 1 P/N 14976	 10-24 x 1 P/N 15010	 1/4-20 x 1/2 P/N 15028	 1/4-20 x 1-1/2 P/N 15038

A32-4

TRAY FRONT



























18-8 STAINLESS STEEL SOCKET SET SCREW ASSORTMENT

P/N 7760

FEATURES:

- Meets ANSI B18.3
- Minimum tensile 100,000 - 125,000 PSI
- Yield - 55,000 - 75,000 PSI
- Hardness - 100 Rockwell B
- Thread diameter to class 3A fit ANSI B1.1

325

 6-32 x 1/8 P/N 15342	 8-32 x 1/8 P/N 15361	 10-32 x 3/16 P/N 15400	 10-24 x 3/16 P/N 15380	 1/4-20 x 1/4 P/N 15423	 5/16-18 x 1/2 P/N 15446
 6-32 x 3/16 P/N 15345	 8-32 x 3/16 P/N 15364	 10-32 x 1/4 P/N 15403	 10-24 x 1/4 P/N 15383	 1/4-20 x 3/8 P/N 15426	 3/8-16 x 3/8 P/N 15457
 6-32 x 1/4 P/N 15348	 8-32 x 1/4 P/N 15367	 10-32 x 3/8 P/N 15406	 10-24 x 3/8 P/N 15386	 1/4-20 x 1/2 P/N 15429	 3/8-16 x 1/2 P/N 15460
 6-32 x 3/8 P/N 15351	 8-32 x 3/8 P/N 15370	 10-32 x 1/2 P/N 15409	 10-24 x 1/2 P/N 15389	 5/16-18 x 3/8 P/N 15443	 1/2-13 x 1/2 P/N 15474

A325

TRAY FRONT



























18-8 STAINLESS STEEL HEX SOCKET CAP SCREW ASSORTMENT

P/N 7761

FEATURES:

- Thread - Class 3A fit. ANSI B1.1
- Dimensions to ANSI B18.3

255

 6-32 x 1/4 P/N 15117	 6-32 x 3/4 P/N 15129	 8-32 x 3/4 P/N 15147	 10-32 x 5/8 P/N 15194	 10-24 x 1/2 P/N 15166	 10-32 x 1-1/4 P/N 15206
 6-32 x 3/8 P/N 15120	 8-32 x 3/8 P/N 15138	 8-32 x 1 P/N 15153	 10-32 x 3/4 P/N 15197	 10-24 x 5/8 P/N 15169	 10-32 x 1-1/2 P/N 15209
 6-32 x 1/2 P/N 15123	 8-32 x 1/2 P/N 15141	 10-32 x 3/8 P/N 15188	 10-32 x 1 P/N 15203	 10-24 x 3/4 P/N 15172	 10-24 x 1-1/4 P/N 15178
 6-32 x 5/8 P/N 15126	 8-32 x 5/8 P/N 15144	 10-32 x 1/2 P/N 15191	 10-24 x 3/8 P/N 15163	 10-24 x 1 P/N 15176	 10-24 x 1-1/2 P/N 15181

A326

TRAY FRONT



























18-8 STAINLESS STEEL PAN HEAD SHEET METAL SCREW ASSORTMENT

P/N 7762

FEATURES:

- *Stainless steel reduces rust and corrosion providing longer life*

985

 6 x 3/8 P/N 14603	 6 x 1 P/N 14615	 8 x 1 P/N 14629	 10 x 1 P/N 14649	 12 x 1 P/N 14669	 14 x 3/4 P/N 14686
 6 x 1/2 P/N 14606	 8 x 1/2 P/N 14620	 10 x 1/2 P/N 14640	 10 x 1-1/4 P/N 14652	 12 x 1-1/4 P/N 14672	 14 x 1 P/N 14689
 6 x 5/8 P/N 14609	 8 x 5/8 P/N 14623	 10 x 5/8 P/N 14643	 12 x 5/8 P/N 14663	 12 x 1-1/2 P/N 14675	 14 x 1-1/4 P/N 14692
 6 x 3/4 P/N 14612	 8 x 3/4 P/N 14626	 10 x 3/4 P/N 14646	 12 x 3/4 P/N 14666	 14 x 5/8 P/N 14683	 14 x 1-1/2 P/N 14695

A327

TRAY FRONT



























CIC 200™ 18-8 STAINLESS STEEL PHILLIPS OVAL HEAD MACHINE SCREW ASSORTMENT WITH HEX NUTS

P/N 7795

FEATURES:

- 18-8 Stainless steel - excellent in corrosive environments
- Minimum tensile strength 100,000 - 125,000 psi
- Yield - 55,000 - 75,000 psi
- Hardness - 100 Rockwell B

1370

 6-32 P/N 14332	 8-32 P/N 14334	 10-32 P/N 14336	 10-24 P/N 14338	 10-24 x 1-1/4 P/N 25129	 1/4-20 x 3/4 P/N 25135
 6-32 x 1/2 P/N 25105	 8-32 x 1/2 P/N 25112	 10-32 x 1/2 P/N 25119	 10-24 x 1/2 P/N 25126	 10-24 x 1-1/2 P/N 25130	 1/4-20 x 1 P/N 25136
 6-32 x 3/4 P/N 25106	 8-32 x 3/4 P/N 25113	 10-32 x 3/4 P/N 25120	 10-24 x 3/4 P/N 25127	 1/4-20 P/N 14300	 1/4-20 x 1-1/4 P/N 25137
 6-32 x 1 P/N 25107	 8-32 x 1 P/N 25114	 10-32 x 1 P/N 25121	 10-24 x 1 P/N 25128	 1/4-20 x 1/2 P/N 25134	 1/4-20 x 1-1/2 P/N 25138

A328

TRAY FRONT



























CIC 200™ 18-8 STAINLESS STEEL PHILLIPS PAN HEAD MACHINE SCREW ASSORTMENT WITH HEX NUTS

P/N 7789

FEATURES:

- 18-8 stainless steel - excellent in corrosion environments
- Meets ANSI B18.6.3
- Minimum tensile 100,000-125,000 PSI
- Yield – 55,000 - 75,000 PSI
- Hardness – 100 Rockwell B

1370

 6-32 P/N 14332	 8-32 P/N 14334	 10-32 P/N 14336	 10-24 P/N 14338	 10-24 x 1-1/4 P/N 25042	 1/4-20 x 3/4 P/N 25049
 6-32 x 1/2 P/N 25013	 8-32 x 1/2 P/N 25020	 10-32 x 1/2 P/N 25029	 10-24 x 1/2 P/N 25039	 10-24 x 1-1/2 P/N 25043	 1/4-20 x 1 P/N 25050
 6-32 x 3/4 P/N 25014	 8-32 x 3/4 P/N 25021	 10-32 x 3/4 P/N 25030	 10-24 x 3/4 P/N 25040	 1/4-20 P/N 14300	 1/4-20 x 1-1/4 P/N 25051
 6-32 x 1 P/N 25015	 8-32 x 1 P/N 25022	 10-32 x 1 P/N 25031	 10-24 x 1 P/N 25041	 1/4-20 x 1/2 P/N 25048	 1/4-20 x 1-1/2 P/N 25052

A329

TRAY FRONT



























CIC 200™ 18-8 STAINLESS STEEL PHILLIPS OVAL HEAD SHEET METAL SCREW ASSORTMENT

P/N 7784

FEATURES:

- 18-8 stainless steel excellent in corrosive environment
- Minimum tensile – 100,000-125,000 psi
- Yield – 55,000-75,000 psi
- Hardness – 100 Rockwell B

925

 6 x 1/2 P/N 25204	 6 x 1-1/4 P/N 25208	 8 x 1 P/N 25212	 10 x 3/4 P/N 25217	 12 x 3/4 P/N 25224	 14 x 3/4 P/N 25230
 6 x 5/8 P/N 25205	 8 x 1/2 P/N 25209	 8 x 1-1/4 P/N 25213	 10 x 1 P/N 25218	 12 x 1 P/N 25225	 14 x 1 P/N 25231
 6 x 3/4 P/N 25206	 8 x 5/8 P/N 25210	 10 x 1/2 P/N 25215	 10 x 1-1/4 P/N 25219	 12 x 1-1/4 P/N 25226	 14 x 1-1/4 P/N 25232
 6 x 1 P/N 25207	 8 x 3/4 P/N 25211	 10 x 5/8 P/N 25216	 10 x 1-1/2 P/N 25220	 12 x 1-1/2 P/N 25227	 14 x 1-1/2 P/N 25233

A32-10

TRAY FRONT



























CIC 200™ 18-8 STAINLESS STEEL PHILLIPS PAN HEAD SHEET METAL SCREW ASSORTMENT

P/N 7785

FEATURES:

- 18-8 stainless steel - excellent for corrosion environment
- Minimum tensile 100,000 - 125,000 psi
- Yield – 55,000 - 75,000 psi
- Hardness – 100 Rockwell B

985

 6 x 3/8 P/N 25303	 6 x 1 P/N 25307	 8 x 1 P/N 25314	 10 x 1 P/N 25323	 12 x 1 P/N 25333	 14 x 3/4 P/N 25342
 6 x 1/2 P/N 25304	 8 x 1/2 P/N 25311	 10 x 1/2 P/N 25320	 10 x 1-1/4 P/N 25324	 12 x 1-1/4 P/N 25334	 14 x 1 P/N 25343
 6 x 5/8 P/N 25305	 8 x 5/8 P/N 25312	 10 x 5/8 P/N 25321	 12 x 5/8 P/N 25331	 12 x 1-1/2 P/N 25335	 14 x 1-1/4 P/N 25344
 6 x 3/4 P/N 25306	 8 x 3/4 P/N 25313	 10 x 3/4 P/N 25322	 12 x 3/4 P/N 25332	 14 x 5/8 P/N 25341	 14 x 1-1/2 P/N 25345

A32-11

TRAY FRONT



























S/S DRILL AND TAP SCREWS HEX WASHER HEAD

P/N 17763

FEATURES:

- May be used in many materials such as structured steel, hardwood and masonite
- Eliminates need for drill bits and taps
- Reduces labor and tooling costs
- Manufactured of 410 grade stainless steel for maximum strength

525

 6 x 3/8 P/N 25350	 8 x 5/8 P/N 25355	 8 x 1-1/2 P/N 25359	 10 x 1 P/N 25364	 12 x 1 P/N 25369	 14 x 1 P/N 25375
 6 x 1/2 P/N 25351	 8 x 3/4 P/N 25356	 10 x 1/2 P/N 25361	 10 x 1-1/4 P/N 25365	 12 x 1-1/2 P/N 25371	 14 x 1-1/4 P/N 25376
 6 x 1 P/N 25353	 8 x 1 P/N 25357	 10 x 5/8 P/N 25362	 10 x 1-1/2 P/N 25366	 12 x 2 P/N 25372	 14 x 1-1/2 P/N 25377
 8 x 1/2 P/N 25354	 8 x 1-1/4 P/N 25358	 10 x 3/4 P/N 25363	 12 x 3/4 P/N 25368	 14 x 3/4 P/N 25374	 14 x 2 P/N 25378

A32-12

TRAY FRONT



























CIC 200™ STAINLESS STEEL PHILLIPS FLAT HEAD MACHINE SCREW ASSORTMENT

P/N 17767

FEATURES:

- Precision, burr-free threads for exact fit
- For faster application without slippage using a screw gun, drill motor or screwdriver
- Stainless steel for superior rust and corrosion resistance

1050

 6-32 x 1/2 P/N 25434	 8-32 x 1/2 P/N 25447	 10-24 x 1/2 P/N 25458	 10-24 x 1-1/4 P/N 25462	 10-32 x 3/4 P/N 25471	 1/4-20 x 1 P/N 25489
 6-32 x 5/8 P/N 25435	 8-32 x 5/8 P/N 25448	 10-24 x 5/8 P/N 25459	 10-24 x 1-1/2 P/N 25463	 10-32 x 1 P/N 25472	 1/4-20 x 1-1/4 P/N 25490
 6-32 x 3/4 P/N 25436	 8-32 x 3/4 P/N 25449	 10-24 x 3/4 P/N 25460	 10-32 x 1/2 P/N 25469	 1/4-20 x 1/2 P/N 25486	 1/4-20 x 1-1/2 P/N 25491
 6-32 x 1 P/N 25437	 8-32 x 1 P/N 25450	 10-24 x 1 P/N 25461	 10-32 x 5/8 P/N 25470	 1/4-20 x 3/4 P/N 25488	 1/4-20 x 2 P/N 25493

A32-13

TRAY FRONT



























CIC 200™ METRIC STAINLESS STEEL NUTS, FLAT WASHERS AND LOCK WASHERS ASSORTMENT

P/N 17768

FEATURES:

- Superior corrosion resistance to chemicals and sea water
- High molybdenum content, high temperature strength and non-magnetic

2370

 3mm LOCK WASHER P/N 15839	 4mm LOCK WASHER P/N 15840	 5mm LOCK WASHER P/N 15841	 6mm LOCK WASHER P/N 15842	 8mm LOCK WASHER P/N 15843	 10mm LOCK WASHER P/N 15844
 3mm FLAT WASHER P/N 15826	 4mm FLAT WASHER P/N 15827	 5mm FLAT WASHER P/N 15828	 6mm FLAT WASHER P/N 15829	 8mm FLAT WASHER P/N 15830	 10mm FLAT WASHER P/N 15831
 3mm x 0.50 HEX NUT P/N 15800	 4mm x 0.70 HEX NUT P/N 15801	 5mm x 0.80 HEX NUT P/N 15802	 6mm x 1.00 HEX NUT P/N 15803	 8mm x 1.25 HEX NUT P/N 15804	 10mm x 1.50 HEX NUT P/N 15805
 3mm x 0.50 NYLON INSERT LOCK NUT P/N 15813	 4mm x 0.70 NYLON INSERT LOCK NUT P/N 15814	 5mm x 0.80 NYLON INSERT LOCK NUT P/N 15815	 6mm x 1.00 NYLON INSERT LOCK NUT P/N 15816	 8mm x 1.25 NYLON INSERT LOCK NUT P/N 15817	 10mm x 1.50 NYLON INSERT LOCK NUT P/N 15818

A32-14

TRAY FRONT



























STAINLESS STEEL SOCKET HEAD CAP SCREWS (4-40 to 10-32)

P/N 17802

FEATURES:

- Deep socket provides stronger hex key engagement
- Smooth, chamfered end assures easy threading
- Unified 3A thread fit meets ASME/ANSI B18.3
- 18-8 stainless steel
- Excellent resistance to rust and corrosion from acids, organic substances, salt solutions and atmosphere
- Operating temperature to 800°F

595

 4-40 x 1/4 P/N 15102	 4-40 x 3/8 P/N 15105	 4-40 x 1/2 P/N 15108	 6-32 x 1/4 P/N 15117	 6-32 x 3/8 P/N 15120	 6-32 x 1/2 P/N 15123
 6-32 x 5/8 P/N 15126	 8-32 x 3/8 P/N 15138	 8-32 x 1/2 P/N 15141	 8-32 x 5/8 P/N 15144	 8-32 x 3/4 P/N 15147	 8-32 x 1 P/N 15153
 10-24 x 3/8 P/N 15163	 10-24 x 1/2 P/N 15166	 10-24 x 5/8 P/N 15169	 10-24 x 3/4 P/N 15172	 10-24 x 1 P/N 15176	 10-24 x 1-1/2 P/N 15181
 10-32 x 3/8 P/N 15188	 10-32 x 1/2 P/N 15191	 10-32 x 5/8 P/N 15194	 10-32 x 3/4 P/N 15197	 10-32 x 1 P/N 15203	 10-32 x 1-1/2 P/N 15209

A32-15

TRAY FRONT






















STAINLESS STEEL SOCKET HEAD CAP SCREWS (1/4-20 to 1/2-13)

P/N 17803

FEATURES:

- Deep socket provides stronger hex key engagement
- Smooth, chamfered end assures easy threading
- Unified 3A thread fit meets ASME/ANSI B18.3
- 18-8 stainless steel
- Excellent resistance to rust and corrosion from acids, organic substances, salt solutions and atmosphere
- Operating temperature to 800°F

205

 1/4-20 x 3/8 P/N 15216	 5/16-18 x 1/2 P/N 15247	 3/8-16 x 1/2 P/N 15272	 1/2-13 x 1 P/N 15300
 1/4-20 x 1/2 P/N 15219	 5/16-18 x 5/8 P/N 15250	 3/8-16 x 5/8 P/N 15275	 1/2-13 x 1-1/4 P/N 15303
 1/4-20 x 5/8 P/N 15222	 5/16-18 x 3/4 P/N 15253	 3/8-16 x 3/4 P/N 15278	 1/2-13 x 1-1/2 P/N 15306
 1/4-20 x 3/4 P/N 15225	 5/16-18 x 1 P/N 15256	 3/8-16 x 1 P/N 15281	 1/2-13 x 2 P/N 15312
 1/4-20 x 1 P/N 15231	 5/16-18 x 1-1/2 P/N 15262	 3/8-16 x 1-1/4 P/N 15284	

A32-16

TRAY FRONT


























STAINLESS STEEL FLAT HEAD SOCKET CAP SCREWS (4-40 to 10-32) P/N 17804

FEATURES:

- Deep socket provides stronger hex key engagement
- Smooth, chamfered end assures easy threading
- Unified 3A thread fit meets ASME/ANSI B18.3
- 18-8 stainless steel
- Excellent resistance to rust and corrosion from acids, organic substances, salt solutions and atmosphere
- Operating temperature to 800°F

855

 4-40 x 1/4 P/N 47800	 4-40 x 3/8 P/N 47801	 4-40 x 1/2 P/N 47802	 4-40 x 3/4 P/N 47803	 4-40 x 1 P/N 47804	 6-32 x 1/4 P/N 47805
 6-32 x 3/8 P/N 47806	 6-32 x 1/2 P/N 47807	 6-32 x 3/4 P/N 47808	 6-32 x 1 P/N 47809	 8-32 x 1/4 P/N 47810	 8-32 x 3/8 P/N 47811
 8-32 x 1/2 P/N 47812	 8-32 x 3/4 P/N 47813	 8-32 x 1 P/N 47814	 10-24 x 3/8 P/N 47815	 10-24 x 1/2 P/N 47816	 10-24 x 3/4 P/N 47817
 10-24 x 1 P/N 47818	 10-32 x 3/8 P/N 47819	 10-32 x 1/2 P/N 47820	 10-32 x 3/4 P/N 47821	 10-32 x 1 P/N 47822	

A32-17

TRAY FRONT






















STAINLESS STEEL FLAT HEAD SOCKET CAP SCREWS (1/4-20 to 1/2-13) P/N 17805

FEATURES:

- Deep socket provides stronger hex key engagement
- Smooth, chamfered end assures easy threading
- Unified 3A thread fit meets ASME/ANSI B18.3
- 18-8 stainless steel
- Excellent resistance to rust and corrosion from acids, organic substances, salt solutions and atmosphere
- Operating temperature to 800°F

205

 1/4-20 x 1/2 P/N 47823	 5/16-18 x 1/2 P/N 47829	 3/8-16 x 3/4 P/N 47835	 1/2-13 x 1 P/N 47841
 1/4-20 x 3/4 P/N 47824	 5/16-18 x 3/4 P/N 47830	 3/8-16 x 1 P/N 47836	 1/2-13 x 1-1/4 P/N 47842
 1/4-20 x 1 P/N 47825	 5/16-18 x 1 P/N 47831	 3/8-16 x 1-1/4 P/N 47837	 1/2-13 x 1-1/2 P/N 47843
 1/4-20 x 1-1/4 P/N 47826	 5/16-18 x 1-1/4 P/N 47832	 3/8-16 x 1-1/2 P/N 47838	 1/2-13 x 2 P/N 47844
 1/4-20 x 1-1/2 P/N 47827	 5/16-18 x 1-1/2 P/N 47833	 3/8-16 x 2 P/N 47839	

A32-18

TRAY FRONT


























STAINLESS STEEL BUTTON HEAD SOCKET CAP SCREWS (4-40 to 10-32)

P/N 17806

FEATURES:

- Deep socket provides stronger hex key engagement
- Smooth, chamfered end assures easy threading
- Unified 3A thread fit meets ASME/ANSI B18.3
- 18-8 stainless steel
- Excellent resistance to rust and corrosion from acids, organic substances, salt solutions and atmosphere
- Operating temperature to 800°F

855

 4-40 x 1/4 P/N 47850	 4-40 x 3/8 P/N 47851	 4-40 x 1/2 P/N 47852	 4-40 x 3/4 P/N 47853	 4-40 x 1 P/N 47854	 6-32 x 1/4 P/N 47855
 6-32 x 3/8 P/N 47856	 6-32 x 1/2 P/N 47857	 6-32 x 3/4 P/N 47858	 6-32 x 1 P/N 47859	 8-32 x 1/4 P/N 47860	 8-32 x 3/8 P/N 47861
 8-32 x 1/2 P/N 47862	 8-32 x 3/4 P/N 47863	 8-32 x 1 P/N 47864	 10-24 x 3/8 P/N 47865	 10-24 x 1/2 P/N 47866	 10-24 x 3/4 P/N 47867
 10-24 x 1 P/N 47868	 10-32 x 3/8 P/N 47869	 10-32 x 1/2 P/N 47870	 10-32 x 3/4 P/N 47871	 10-32 x 1 P/N 47872	

A32-19

TRAY FRONT






















STAINLESS STEEL BUTTON HEAD SOCKET CAP SCREWS (1/4-20 to 1/2-13)

P/N 17807

FEATURES:

- Deep socket provides stronger hex key engagement
- Smooth, chamfered end assures easy threading
- Unified 3A thread fit meets ASME/ANSI B18.3
- 18-8 stainless steel
- Excellent resistance to rust and corrosion from acids, organic substances, salt solutions and atmosphere
- Operating temperature to 800°F

210

 1/4-20 x 1/2 P/N 47873	 5/16-18 x 1/2 P/N 47879	 3/8-16 x 3/4 P/N 47885	 1/2-13 x 1 P/N 47891
 1/4-20 x 3/4 P/N 47874	 5/16-18 x 3/4 P/N 47880	 3/8-16 x 1 P/N 47886	 1/2-13 x 1-1/4 P/N 47892
 1/4-20 x 1 P/N 47875	 5/16-18 x 1 P/N 47881	 3/8-16 x 1-1/4 P/N 47887	 1/2-13 x 1-1/2 P/N 47893
 1/4-20 x 1-1/4 P/N 47876	 5/16-18 x 1-1/4 P/N 47882	 3/8-16 x 1-1/2 P/N 47888	 1/2-13 x 2 P/N 47894
 1/4-20 x 1-1/2 P/N 47877	 5/16-18 x 1-1/2 P/N 47883	 3/8-16 x 2 P/N 47889	

A32-20

TRAY FRONT
















S/S WOODRUFF KEY ASSORTMENT

P/N 17796

FEATURES:

- Excellent corrosion resistance, withstands many chemicals and non-magnetic
- Use to lock pulleys and gears tightly to transmission shafts
- Keys provide a bearing surface through the entire length of the shaft

75

 1/16 x 1/2 P/N 63430	 3/32 x 1/2 P/N 63431	 1/8 x 1/2 P/N 63432	 1/8 x 5/8 P/N 63433
 1/8 x 3/4 P/N 63434	 5/32 x 5/8 P/N 63435	 5/32 x 3/4 P/N 63436	 3/16 x 5/8 P/N 63437
 3/16 x 3/4 P/N 63438	 3/16 x 7/8 P/N 63439	 1/4 x 3/4 P/N 63440	 1/4 x 7/8 P/N 63441
 1/4 x 1 P/N 63442			

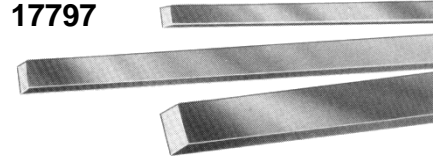
A3221

TRAY FRONT



STAINLESS STEEL KEYSTOCK ASSORTMENT

P/N 17797



- FEATURES:**
- Use in corrosive, caustic and sanitary environments
 - Machine cut ends
 - Tolerances: $-.000$ to $+.002$ in both dimensions
 - Material 303 stainless

14

1/8" x 12"
P/N 63450



3/16" x 12"
P/N 63451



1/4" x 12"
P/N 63452



5/16" x 12"
P/N 63453



3/8" x 12"
P/N 63454



1/2" x 12"
P/N 63455



A3222

TRAY FRONT



























STAINLESS STEEL SPRING PIN ASSORTMENT

P/N 17815

FEATURES:

- 420 stainless steel for maximum strength and corrosion resistance

1115

 1/16 x 1/4 P/N 47200	 1/16 x 1/2 P/N 47202	 1/16 x 3/4 P/N 47204	 5/64 x 1/4 P/N 47206	 5/64 x 1/2 P/N 47208	 5/64 x 3/4 P/N 47210
 3/32 x 1/4 P/N 47212	 3/32 x 3/4 P/N 47218	 3/32 x 1 P/N 47220	 1/8 x 3/8 P/N 47222	 1/8 x 1 P/N 47227	 1/8 x 1-1/2 P/N 47229
 5/32 x 1/2 P/N 47230	 5/32 x 1 P/N 47234	 5/32 x 1-1/2 P/N 47236	 3/16 x 5/8 P/N 47238	 3/16 x 1 P/N 47241	 3/16 x 2 P/N 47245
 7/32 x 3/4 P/N 47247	 7/32 x 1-1/2 P/N 47250	 7/32 x 2 P/N 47252	 1/4 x 1 P/N 47255	 1/4 x 2 P/N 47259	 1/4 x 3 P/N 47263

A3223

TRAY FRONT



S/S METRIC SOCKET HEAD CAP SCREW ASSORTMENT

P/N 17818

























FEATURES:

- 304 stainless steel
- Meets DIN 912-A2
- Tensile strength 70,000 to 100,000 psi

REFERENCE DATA

DIAMETER	4mm	5mm	6mm	8mm
THREAD PITCH	0.70	0.80	1.00	1.25
HEX KEY SIZE	3mm	4mm	5mm	6mm

370

 4mm x 8mm P/N 15679	 4mm x 10mm P/N 15680	 4mm x 12mm P/N 15681	 4mm x 16mm P/N 15682	 4mm x 20mm P/N 15683	 4mm x 25mm P/N 15684
 5mm x 10mm P/N 15691	 5mm x 12mm P/N 15692	 5mm x 16mm P/N 15693	 5mm x 20mm P/N 15694	 5mm x 25mm P/N 15695	 5mm x 30mm P/N 15696
 6mm x 10mm P/N 15706	 6mm x 12mm P/N 15707	 6mm x 16mm P/N 15708	 6mm x 20mm P/N 15709	 6mm x 25mm P/N 15710	 6mm x 30mm P/N 15711
 8mm x 16mm P/N 15729	 8mm x 20mm P/N 15730	 8mm x 25mm P/N 15731	 8mm x 30mm P/N 15732	 8mm x 35mm P/N 15733	 8mm x 40mm P/N 15734

A3224

TRAY FRONT



STAINLESS STEEL METRIC FLAT SOCKET HEAD CAP SCREW ASSORTMENT

























P/N 17819

FEATURES:

- 304 stainless steel
- Meets DIN 7991-A2
- Tensile strength 70,000 to 100,000 psi

REFERENCE DATA					
DIAMETER	3mm	4mm	5mm	6mm	8mm
THREAD PITCH	0.50	0.70	0.80	1.00	1.25
HEX KEY SIZE	2mm	2.5mm	3mm	4mm	5mm

690

 3mm x 6mm P/N 69704	 3mm x 8mm P/N 69705	 3mm x 10mm P/N 69706	 3mm x 12mm P/N 69707	 3mm x 16mm P/N 69708	 4mm x 8mm P/N 69710
 4mm x 10mm P/N 69711	 4mm x 12mm P/N 69712	 4mm x 16mm P/N 69713	 4mm x 20mm P/N 69714	 5mm x 10mm P/N 69716	 5mm x 12mm P/N 69717
 5mm x 16mm P/N 69718	 5mm x 20mm P/N 69719	 5mm x 25mm P/N 69720	 6mm x 12mm P/N 69723	 6mm x 16mm P/N 69724	 6mm x 20mm P/N 69725
 6mm x 25mm P/N 69726	 6mm x 30mm P/N 69727	 8mm x 16mm P/N 69731	 8mm x 20mm P/N 69732	 8mm x 25mm P/N 69733	 8mm x 30mm P/N 69734

A32.25

TRAY FRONT



STAINLESS STEEL METRIC BUTTON HEAD SOCKET CAP SCREW ASSORTMENT

























FEATURES:

- 304 stainless steel
- Meets DIN 7991-A2
- Tensile strength 70,000 to 100,000 psi

REFERENCE DATA					
DIAMETER	3mm	4mm	5mm	6mm	8mm
THREAD PITCH	0.50	0.70	0.80	1.00	1.25
HEX KEY SIZE	2mm	2.5mm	3mm	4mm	5mm

P/N 17814

480

 3mm x 6mm P/N 69754	 3mm x 8mm P/N 69755	 3mm x 10mm P/N 69756	 3mm x 12mm P/N 69757	 3mm x 16mm P/N 69758	 4mm x 8mm P/N 69760
 4mm x 10mm P/N 69761	 4mm x 12mm P/N 69762	 4mm x 16mm P/N 69763	 4mm x 20mm P/N 69764	 5mm x 10mm P/N 69766	 5mm x 12mm P/N 69767
 5mm x 16mm P/N 69768	 5mm x 20mm P/N 69769	 5mm x 25mm P/N 69770	 6mm x 12mm P/N 69773	 6mm x 16mm P/N 69774	 6mm x 20mm P/N 69775
 6mm x 25mm P/N 69776	 6mm x 30mm P/N 69777	 8mm x 16mm P/N 69781	 8mm x 20mm P/N 69782	 8mm x 25mm P/N 69783	 8mm x 30mm P/N 69784

A32-26

TRAY FRONT



STAINLESS STEEL METRIC SOCKET SET SCREW ASSORTMENT

































P/N 17816

FEATURES:

- 304 stainless steel
- Cup point
- Meets DIN 916-A2
- Tensile strength 70,000 to 100,000 psi

REFERENCE DATA							
DIAMETER	3mm	4mm	5mm	6mm	8mm	10mm	12mm
THREAD PITCH	0.50	0.70	0.80	1.00	1.25	1.50	1.7
HEX KEY SIZE	1.5mm	2mm	2.5mm	3mm	4mm	5mm	6mm

469

 3mm x 4mm P/N 69793	 3mm x 6mm P/N 69794	 3mm x 8mm P/N 69795	 4mm x 4mm P/N 69796	 4mm x 6mm P/N 69797	 4mm x 8mm P/N 69798	 4mm x 10mm P/N 69799	 5mm x 5mm P/N 69800
 5mm x 6mm P/N 69801	 5mm x 8mm P/N 69802	 5mm x 10mm P/N 69803	 6mm x 8mm P/N 69804	 6mm x 10mm P/N 69805	 6mm x 12mm P/N 69806	 6mm x 16mm P/N 69807	 6mm x 20mm P/N 69808
 8mm x 10mm P/N 69809	 8mm x 12mm P/N 69810	 8mm x 16mm P/N 69811	 8mm x 20mm P/N 69812	 8mm x 25mm P/N 69813	 10mm x 10mm P/N 69814	 10mm x 12mm P/N 69815	 10mm x 16mm P/N 69816
 10mm x 20mm P/N 69817	 10mm x 25mm P/N 69818	 10mm x 30mm P/N 69819	 12mm x 12mm P/N 69820	 12mm x 16mm P/N 69821	 12mm x 20mm P/N 69822	 12mm x 25mm P/N 69823	 12mm x 30mm P/N 69824

TRAY FRONT

A3227





















S/S HEX JAM NUT ASSORTMENT

P/N 17823
FEATURES:

- Coarse and fine threads
- 2/3 the thickness of a full form nut
- Tighten nuts against each other to keep from loosening
- Ideal for chemical machine and other corrosive environments

310


1/4-20 P/N 15850 	5/8-11 P/N 15856 	1/4-28 P/N 15870 	5/8-18 P/N 15875 
5/16-18 P/N 15851 	3/4-10 P/N 15857 	5/16-24 P/N 15871 	3/4-16 P/N 15876 
3/8-16 P/N 15852 	7/8-9 P/N 15858 	3/8-24 P/N 15872 	7/8-14 P/N 15877 
7/16-14 P/N 15853 	1-8 P/N 15859 	7/16-20 P/N 15873 	1-14 P/N 15878 
1/2-13 P/N 15854 		1/2-20 P/N 15874 	

A32-28

TRAY FRONT



S/S WING NUT & CAP NUT ASSORTMENT



ACORN NUT FEATURES:

















- Hex shape wrenching surface with cap shaped top
- Provides protection for projecting threaded parts
- Excellent in corrosive environments
- Coarse and fine threads

WING NUT FEATURES:

P/N 17838


- Minimum 100,000 - 125,000 psi tensile strength
- Rockwell "B" hardness 100

233

 6-32 P/N 14362	 8-32 P/N 14364	 10-24 P/N 14366	 10-32 P/N 14368
 1/4-20 P/N 14370	 5/16-18 P/N 14372	 3/8-16 P/N 14374	 1/2-13 P/N 14376
 6-32 P/N 15880	 8-32 P/N 15881	 10-24 P/N 15882	 1/4-20 P/N 15884
 5/16-18 P/N 15885	 3/8-16 P/N 15886	 1/2-13 P/N 15887	 5/8-11 P/N 15888

A32-293

TRAY FRONT



STAINLESS STEEL NUT, LOCK WASHER, FLAT WASHER ASSORTMENT P/N 17840

LOCK WASHER AND FLAT WASHER FEATURES:
 • Meets ANSI B18.21.1
 • Hardness – 35 Rockwell “C” minimum


HEX NUT AND LOCK NUT FEATURES:
 • Minimum tensile 100,000 - 125,000 psi
 • Hardness – 100 Rockwell “B”

3050

#4 Lock Washer P/N 14400	#6 Lock Washer P/N 14402	#8 Lock Washer P/N 14404	#10 Lock Washer P/N 14406	#12 Lock Washer P/N 14408	1/4 Lock Washer P/N 14410
#4 Flat Washer P/N 14500	#6 Flat Washer P/N 14502	#8 Flat Washer P/N 14504	#10 Flat Washer P/N 14506	#12 Flat Washer P/N 14508	1/4 Flat Washer P/N 14510
4-40 Hex Nut P/N 14330	6-32 Hex Nut P/N 14332	8-32 Hex Nut P/N 14334	10-24 Hex Nut P/N 14338	10-32 Hex Nut P/N 14336	12-24 Hex Nut P/N 14339
1/4-20 Hex Nut P/N 14300	6-32 Lock Nut P/N 14342	8-32 Lock Nut P/N 14344	10-24 Lock Nut P/N 14348	10-32 Lock Nut P/N 14346	1/4-20 Lock Nut P/N 14350

A32-30

TRAY FRONT



STAINLESS STEEL MICRO HEX NUT, LOCK AND FLAT WASHER ASSORTMENT

P/N 17833

FEATURES:


- Hex Nuts and Nylon Lock Nuts: Hardness – 100 Rockwell B
- Lock Washers and Flat Washers: Hardness – 35 Rockwell C Minimum

1800

 0-80 Hex Nut P/N 14326	 1-72 Hex Nut P/N 14327	 2-56 Hex Nut P/N 14328	 3-48 Hex Nut P/N 14329	 4-40 Hex Nut P/N 14330	 5-40 Hex Nut P/N 14331
 2-56 Nylon Lock Nut P/N 14335	 3-48 Nylon Lock Nut P/N 14337	 4-40 Nylon Lock Nut P/N 14340	 5-40 Nylon Lock Nut P/N 14341	EXPANSION	EXPANSION
 #2 Flat Washer P/N 14498	 #3 Flat Washer P/N 14497	 #4 Flat Washer P/N 14500	 #5 Flat Washer P/N 14501	EXPANSION	EXPANSION
 #2 Lock Washer P/N 14398	 #3 Lock Washer P/N 14399	 #4 Lock Washer P/N 14400	 #5 Lock Washer P/N 14401	EXPANSION	EXPANSION

A3231

TRAY FRONT



































STAINLESS STEEL MICRO SLOTTED MACHINE SCREW ASSORTMENT

P/N 17832

FEATURES:

- Meets ANSI B18.6.3
- Minimum Tensile Strength 100,000 - 125,000 PSI
- Yield – 55,000 - 75,000 PSI
- Hardness – 100 Rockwell B

1600

 0-80 x 1/8 RH P/N 25235	 0-80 x 1/4 RH P/N 25237	 0-80 x 3/8 RH P/N 25239	 0-80 x 1/2 RH P/N 25240	 0-80 x 5/8 RH P/N 25241	 0-80 x 3/4 RH P/N 25242	 1-72 x 1/8 RH P/N 25243	 1-72 x 1/4 RH P/N 25245
 1-72 x 3/8 RH P/N 25247	 1-72 x 1/2 RH P/N 25248	 1-72 x 5/8 RH P/N 25249	 1-72 x 3/4 RH P/N 25250	 2-56 x 1/4 RH P/N 25253	 2-56 x 3/8 RH P/N 25255	 2-56 x 1/2 RH P/N 25256	 2-56 x 5/8 RH P/N 25257
 2-56 x 3/4 RH P/N 25258	 2-56 x 1 RH P/N 25260	 3-48 x 1/4 RH P/N 25264	 3-48 x 3/8 RH P/N 25266	 3-48 x 1/2 RH P/N 25267	 3-48 x 5/8 RH P/N 25268	 3-48 x 3/4 RH P/N 25269	 3-48 x 1 RH P/N 25270
 4-40 x 1/4 PH P/N 14700	 4-40 x 1/2 PH P/N 14704	 4-40 x 3/4 PH P/N 14708	 4-40 x 1 PH P/N 14710	 5-40 x 1/4 PH P/N 14711	 5-40 x 1/2 PH P/N 14715	 5-40 x 3/4 PH P/N 14717	 5-40 x 1 PH P/N 14718

TRAY FRONT

A32-32



























STAINLESS STEEL CAP SCREW ASSORTMENT

P/N 17917

FEATURES:

- Resists rust, corrosion, acids and chemicals
- Smooth, chamfered end assures easy threading
- Class 2A precision threads
- Minimum 100,000 - 125,000 psi tensile strength
- Hardness – 100 Rockwell B
- Meets ANSI B18.6.3
- Yield – 55,000 - 75,000 psi

 1/4 Lock Washer P/N 14410	 5/16 Lock Washer P/N 14412	 3/8 Lock Washer P/N 14414	 1/4 USS Commercial Flat Washer P/N 14510	 5/16 USS Commercial Flat Washer P/N 14512	 3/8 USS Commercial Flat Washer P/N 14514
 1/4-20 Finished Hex Nut P/N 14300	 1/4-20 x 1/2 P/N 14100	 1/4-20 x 3/4 P/N 14106	 1/4-20 x 1 P/N 14109	 1/4-20 x 1-1/2 P/N 14115	 1/4-20 x 2 P/N 14121
 5/16-18 Finished Hex Nut P/N 14302	 5/16-18 x 3/4 P/N 14149	 5/16-18 x 1 P/N 14152	 5/16-18 x 1-1/4 P/N 14155	 5/16-18 x 1-1/2 P/N 14158	 5/16-18 x 2 P/N 14164
 3/8-16 Finished Hex Nut P/N 14304	 3/8-16 x 3/4 P/N 14186	 3/8-16 x 1 P/N 14189	 3/8-16 x 1-1/4 P/N 14192	 3/8-16 x 1-1/2 P/N 14195	 3/8-16 x 2 P/N 14201

TRAY FRONT



























STAINLESS STEEL THUMB SCREW ASSORTMENT

P/N 17918

FEATURES:

- Precision burr-free threads for exact fit
- Minimum tensile strength – 100,000 psi
- Yield – 55,000 psi
- Hardness – 100 Rockwell B minimum
- Known as type “P” or spade head style
- Used where frequent tightening and loosening is required

119

 8-32 x 1/2 P/N 44500	 10-24 x 1/2 P/N 44504	 10-32 x 3/4 P/N 44508	 1/4-20 x 1” P/N 44512	 5/16-18 x 1/2 P/N 44516	 3/8-16 x 3/4 P/N 44520
 8-32 x 3/4 P/N 44501	 10-24 x 3/4 P/N 44505	 10-32 x 1” P/N 44509	 1/4-20 x 1-1/4 P/N 44513	 5/16-18 x 3/4 P/N 44517	 3/8-16 x 1” P/N 44521
 8-32 x 1” P/N 44502	 10-24 x 1” P/N 44506	 1/4-20 x 1/2 P/N 44510	 1/4-20 x 1-1/2 P/N 44514	 5/16-18 x 1” P/N 44518	 3/8-16 x 1-1/2 P/N 44522
 8-32 x 1-1/2 P/N 44503	 10-32 x 1/2 P/N 44507	 1/4-20 x 3/4 P/N 44511	 1/4-20 x 2” P/N 44515	 5/16-18 x 2” P/N 44519	 3/8-16 x 2” P/N 44523

A3234

TRAY FRONT



STAINLESS STEEL FENDER WASHER ASSORTMENT (3/16" TO 1/2")



















P/N 17924



FEATURES

- Fender washers have an extra-wide bearing surface, eliminates the need for hole patching
- Precision stamped to exacting tolerances
- 18-8 Stainless Steel - Excellent resistance to rust and corrosion from acids, organic substances, salt solutions and atmosphere

675

  <p>3/16 X 1 ID: 7/32 P/N 14430</p>	<p style="text-align: center; font-size: 2em; opacity: 0.5;">EXPANSION</p>	<p style="text-align: center; font-size: 2em; opacity: 0.5;">EXPANSION</p>
  <p>1/4 X 1 ID: 9/32 P/N 14431</p>	  <p>1/4 X 1-1/4 ID: 9/32 P/N 14432</p>	  <p>1/4 X 1-1/2 ID: 9/32 P/N 14433</p>
  <p>5/16 X 1-1/4 ID: 11/32 P/N 14434</p>	  <p>5/16 X 1-1/2 ID: 11/32 P/N 14435</p>	<p style="text-align: center; font-size: 2em; opacity: 0.5;">EXPANSION</p>
  <p>3/8 X 1-1/4 ID: 13/32 P/N 14436</p>	  <p>3/8 X 1-1/2 ID: 13/32 P/N 14437</p>	  <p>1/2 X 2 ID: 17/32 P/N 14438</p>

A32-35

TRAY FRONT



STAINLESS STEEL NYLON INSERT LOCK NUTS

















P/N 17937
FEATURES:

- 18-8 Stainless steel – excellent resistance to rust and corrosion from acids, organic substances, salt solutions and atmosphere

- One-piece nylon insert for positive 360° locking
- Leak resistant, self-sealing and reusable
- Minimum tensile 100,000-125,000 psi
- Hardness = 100 Rockwell B

330

A32-36

 1/4-20 P/N 14350	 1/2-13 P/N 14354	 1/4-28 P/N 24350	 1/2-20 P/N 24354
 5/16-18 P/N 14351	 9/16-12 P/N 14358	 5/16-24 P/N 24351	 9/16-18 P/N 24358
 3/8-16 P/N 14352	 5/8-11 P/N 14355	 3/8-24 P/N 24352	 5/8-18 P/N 24355
 7/16-14 P/N 14353	 3/4-10 P/N 14356	 7/16-20 P/N 24353	 3/4-16 P/N 24356

TRAY FRONT



























STAINLESS STEEL COTTER PIN ASSORTMENT


P/N 17938

FEATURES:

- Easy to Insert, Lock, Remove and Reuse
- 18 - 8 Stainless steel - excellent resistance to rust and corrosion from acids, organic substances, salt solutions and atmosphere.

1310	 1/16 x 1/2 P/N 14538	 3/32 x 1 P/N 14545	 7/64 x 1-1/2 P/N 14571	 1/8 x 2-1/2 P/N 14551	 5/32 x 2-1/2 P/N 14556	 3/16 x 3 P/N 14561
	 1/16 x 1 P/N 14540	 3/32 x 1-1/2 P/N 14547	 1/8 x 1 P/N 14549	 5/32 x 1 P/N 14553	 3/16 x 1-1/2 P/N 14559	 5/32 x 3 P/N 14557
	 1/16 x 1-1/2 P/N 14541	 3/32 x 2 P/N 14546	 1/8 x 1-1/2 P/N 14550	 5/32 x 1-1/2 P/N 14555	 3/16 x 2 P/N 14560	 1/4 x 2 P/N 14565
A32-38	 3/32 x 1/2 P/N 14543	 7/64 x 1 P/N 14570	 1/8 x 2 P/N 14552	 5/32 x 2 P/N 14554	 1/4 x 1-1/2 P/N 14564	 1/4 x 3 P/N 14566

TRAYE IRON



STAINLESS STEEL METRIC HEX HEAD CAP SCREW ASSORTMENT

























P/N 17944

FEATURES:

- Standard thread DIN 933/931 A2 (304) stainless
- Superior corrosion resistance to chemicals and sea water

- High molybdenum content, high temperature resistance and non-magnetic
- 100,000 psi tensile strength

500

 6mm S/S Lock Washer P/N 15842	 8mm S/S Lock Washer P/N 15843	 10mm S/S Lock Washer P/N 15844	 6mm S/S Flat Washer P/N 15829	 8mm S/S Flat Washer P/N 15830	 10mm S/S Flat Washer P/N 15831
 6mm x 1 Hex Nut S/S P/N 15803	 6mm x 10mm S/S P/N 15953	 6mm x 20mm S/S P/N 15916	 6mm x 30mm S/S P/N 15917	 6mm x 40mm S/S P/N 15918	 6mm x 50mm S/S P/N 15919
 8mm x 1.25 Hex Nut S/S P/N 15804	 8mm x 20mm S/S P/N 15921	 8mm x 25mm S/S P/N 15956	 8mm x 30mm S/S P/N 15922	 8mm x 40mm S/S P/N 15923	 8mm x 50mm S/S P/N 15924
 10mm x 1.5 Hex Nut S/S P/N 15805	 10mm x 20mm S/S P/N 15926	 10mm x 25mm S/S P/N 15927	 10mm x 30mm S/S P/N 15928	 10mm x 40mm S/S P/N 15929	 10mm x 50mm S/S P/N 15930

TRAY FRONT

A32-39



















S/S PHILLIPS PAN HEAD SELF-DRILLING METAL SCREW ASSORTMENT

P/N 17975

FEATURES:

- May be used in many materials such as structured steel, hardwood and masonite
- Eliminates need for drill bits and taps
- Reduces labor and tooling costs
- Manufactured of 410 grade stainless steel for maximum strength

675

 6 x 3/8 P/N 25700	 6 x 1-1/4 P/N 25705	 8 x 1 P/N 25711	 10 x 3/4 P/N 25716
 6 x 1/2 P/N 25701	 6 x 1-1/2 P/N 25706	 8 x 1-1/4 P/N 25712	 10 x 1 P/N 25717
 6 x 3/4 P/N 25703	 8 x 1/2 P/N 25708	 8 x 1-1/2 P/N 25713	 10 x 1-1/4 P/N 25718
 6 x 1 P/N 25704	 8 x 3/4 P/N 25710	 10 x 1/2 P/N 25714	 10 x 1-1/2 P/N 25719

A32-40

TRAY FRONT



























STAINLESS STEEL METRIC PHILLIPS PAN HEAD MACHINE SCREW ASSORTMENT

P/N 17986

FEATURES:

- DIN 7985
- A2 (304) Stainless
- Excellent resistance to rust and corrosion from acids, organic substances, salt solutions and atmosphere

1453

 3mm x 8mm P/N 68001	 3mm x 12mm P/N 68003	 3mm x 20mm P/N 68005	 3mm x 30mm P/N 68007	 3mm S/S LOCKWASHER P/N 15839	 3mm S/S HEX NUT P/N 15800
 4mm x 10mm P/N 68011	 4mm x 20mm P/N 68014	 4mm x 30mm P/N 68016	 4mm x 40mm P/N 68018	 4mm S/S LOCKWASHER P/N 15840	 4mm S/S HEX NUT P/N 15801
 5mm x 10mm P/N 68020	 5mm x 20mm P/N 68023	 5mm x 30mm P/N 68025	 5mm x 40mm P/N 68027	 5mm S/S LOCKWASHER P/N 15841	 5mm S/S HEX NUT P/N 15802
 6mm x 10mm P/N 68029	 6mm x 20mm P/N 68032	 6mm x 30mm P/N 68034	 6mm x 40mm P/N 68036	 6mm S/S LOCKWASHER P/N 15842	 6mm S/S HEX NUT P/N 15803

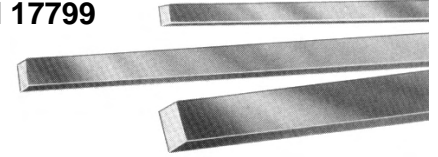
A32-41

TRAY FRONT



STAINLESS STEEL KEYSTOCK ASSORTMENT

P/N 17799



FEATURES:

- Use in corrosive, caustic and sanitary environments
- Machine cut ends
- Tolerances: $-.002$ to $+.000$ in both dimensions
- Material 303 stainless

14

1/8" x 12"
P/N 63460



3/16" x 12"
P/N 63461



1/4" x 12"
P/N 63462



5/16" x 12"
P/N 63463



3/8" x 12"
P/N 63464



1/2" x 12"
P/N 63465



A32.42

TRAY FRONT