

### Assortment – Heat Shrink Connectors and Tubing

#### Heat Shrink Connectors and Tubing Assortment

- Window on connector allows visual inspection
- Uniform copper wall
- Color-coded dashes on tubing indicate sizes
- High adhesive-flow polyolefin tubing seals multiple wires
- Crimp indicator
- Clear tubing allows visual inspection



CHROMATE INDUSTRIAL CORP.		HEAT SHRINK CONNECTORS AND TUBING ASSORTMENT		P/N 17997
<b>FEATURES:</b> • Window on connector allows visual inspection • High adhesive-flow polyolefin tubing seals multiple wires		• Uniform copper wall • Crimp indicator		• Color-coded dashes on tubing indicate sizes • Clear tubing allows visual inspection
<p>24-22 AWG Heat Shrink Multi Wire In-line Connector P/N 21616</p>	<p>20-18 AWG Heat Shrink Multi Wire In-line Connector P/N 21617</p>	<p>0.22" ID - 0.045 ID x 6" Hi-Flow Adhesive Heat Shrink Tubing P/N 32181</p>	<p>0.30" ID - 0.06 ID x 6" Hi-Flow Adhesive Heat Shrink Tubing P/N 32182</p>	
<p>16-14 AWG Heat Shrink Multi Wire In-line Connector P/N 21618</p>	<p>12-10 AWG Heat Shrink Multi Wire In-line Connector P/N 21619</p>	<p>0.35" ID - 0.08 ID x 6" Hi-Flow Adhesive Heat Shrink Tubing P/N 32183</p>	<p>0.45" ID - 0.105 ID x 6" Hi-Flow Adhesive Heat Shrink Tubing P/N 32184</p>	
<p>22-14 AWG Heat Shrink Multi Wire Closed End Connector P/N 21620</p>	<p>18-10 AWG Heat Shrink Multi Wire Closed End Connector P/N 21621</p>	<b>TRAY P/N 17997</b>		
CHROMATE INDUSTRIAL CORP. • 5250-A NAIMAN PARKWAY, SOLON, OH 44139 • 1-800-BUY-BOLT • FAX: 516-567-2418 • www.chromate.com				


298060

17997

### 6 to 1 Shrink Tubing Assortment

#### The Four Most Popular Shrink Tubing Sizes with a Labeled Cabinet for Easy Identification

- Covers wire from #14 AWG through 1000 MCM cable
- 13 pieces / 13 feet of tubing
- Black with thermoplastic adhesive lining which provides a tight gas, water and environmental seal
- Dielectric strength of 500 volts/mil
- Conforms to irregular surface configurations when shrunk
- Ideal for replacing torn cable jackets and insulating connectors
- Fits easily over and seals large connections already made without complete disassembly
- Flame retardant material meets MIL-I-23053 / 15A Specs

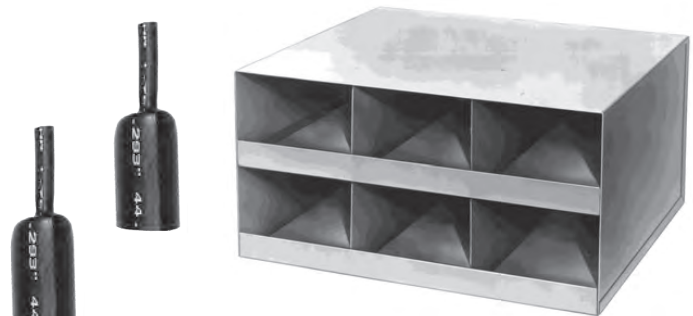

294755

17842